


N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS
STEEL
B3ACE4AN3B



Joyful interaction: unrestricted access thanks to the retracting Hide® door and CircoTherm® hot air system.

- ✓ Slide&Hide® – The fully retracting oven door.
- ✓ Eco Clean with Easy Clean - the duo that makes oven cleaning easier
- ✓ LCD-Display – simple, straightforward with large characters for clear reading
- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to three levels at once.

Built-in / Free-standing: Built-in
Integrated Cleaning system: EcoClean
programme, Hydrolytic
Required niche size for installation (HxWxD): 585-595 x 560-568 x
550 mm
Dimensions: 595x594x548 mm
Dimensions of the packed product (HxWxD): . 675 x 660 x 690 mm
Control Panel Material: Glass
Door Material: Glass
Net weight: 33.9 kg
Usable volume of cavity: 71 l
Cooking method: Full width grill, Hotair gentle, Hot Air,
Conventional heat, Pizza setting, Bottom heat, Hot air grilling
Oven control: mechanical
Length electrical supply cord: 120.0 cm
EAN code:4242004281245
Number of cavities (2010/30/EC): 1
Energy efficiency rating: A+
Energy consumption per cycle conventional (2010/30/EC): 0.94
kWh/cycle
Energy consumption per cycle forced air convection
(2010/30/EC): 0.69 kWh/cycle
Energy efficiency index (2010/30/EC):81.2 %
Connection Rating:2990 W
Fuse protection:13 A
Voltage:220-240 V
Frequency:50; 60 Hz
Plug type: no plug
(electrical connection by electrician)
Included accessories:2 x combination grid, 1 x universal pan



4 242004 281245

2 x combination grid, 1 x universal pan

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0
Universal pan, non-stick ceramic coated, Z11CR10X0 Baking and
roasting grid (standard), Z11GU20X0 Glasspan, Z11TI15X0
Cliprails, Z12CB10A0 Baking tray, enamelled, Z12CL10A0 Lid for
professional pan, enamelled, Z12CM10A0 Moussaka pan,
enamelled, Z12CN10A0 Professional pan, enamelled, Z12CP10A0
Pizza pan, enamelled, Z12CU10A0 Multipurpose pan, enamelled,
Z1365WX0 Wireless food thermometer, Z1608BX0 Full ext rails,
level independent, Z1650BE0 Half tray, Z1655CA0 Air Fry & Grill
tray, Z1913X0 Baking Stone

N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS
STEEL
B3ACE4AN3B

Features

- Oven with 7 PC heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bottom heat, CircoTherm® gentle
- Temperature range 50 °C - 275 °C
- Cavity volume: 71 litre

Level independent telescopic rails

- 4 shelf positions
- Available as an accessory

Design

- Elongated designed dials, Retractable control dials, Bevelled oval controls
- Cavity inner surface: enamel anthracite

Cleaning

- EcoClean Direct : back panel
- EasyClean
- Full glass inner door

Programmes/functions

- LCD Display (White)
- Electronic clock timer
- Heating up indicator
- Automatic start
- Slide&Hide® with fixed handle
- Bar handle
- Manual rapid heating up
- Interior halogen light
- Cooling fan
- Stainless-steel fan

Accessories

- 2 x combination grid, 1 x universal pan

Features

- Heat reflective glass
- Triple glazed door glazed CoolTouch door
- Control panel lock

Technical information

- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Total connected load electric: 2.99 KW

Performance/technical information


- Appliance dimension (hxxwxd): 595 mm x 594 mm x 548 mm
- Niche dimension (hxxwxd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual
- We recommend you to choose complementary products within N50, in order to assure an optimal design combination of your Built-In appliances.

N 50, BUILT-IN OVEN, 60 X 60 CM, STAINLESS
STEEL
B3ACE4AN3B

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

Measurements in mm

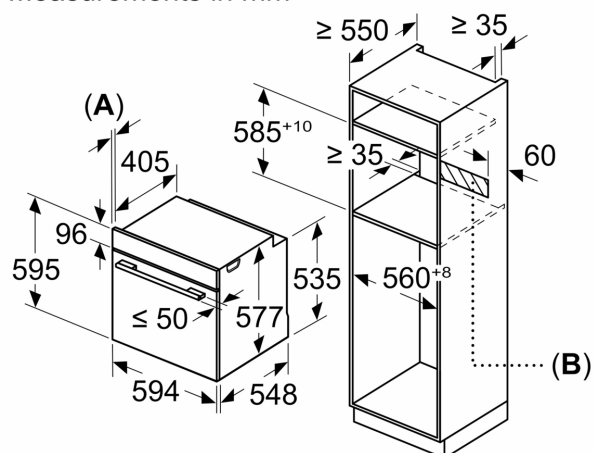


A: 19.5 mm

B: Space for appliance connection 320 x 115 mm

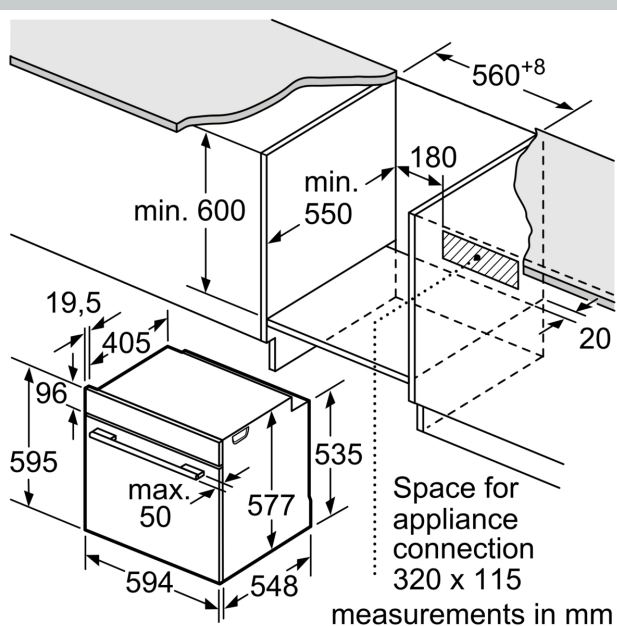

measurements in mm

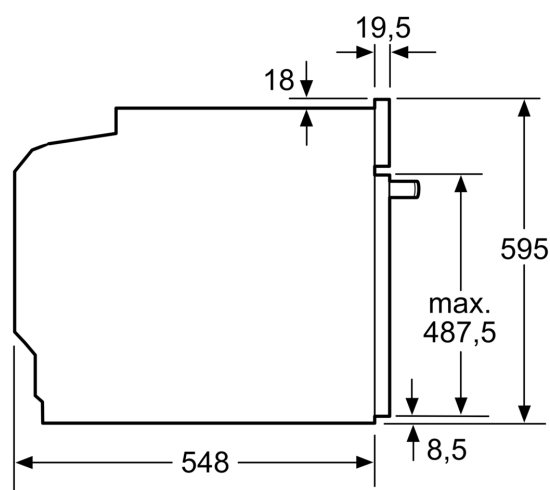

measurements in mm

Installation with a hob.

