






seit 1883



All Blomberg appliances have a 3-year warranty as standard to give you complete piece of mind.



## **CONTENTS**

#### **BUILT-IN**

OVENS **6-15** 



**FREESTANDING** 

COOKERS **46-53** 



HOBS **16-23** 



WASHING MACHINES **54-63** 



WASHING MACHINES **24-29** 



TUMBLE DRYERS **64-69** 



DISHWASHERS **30-35** 



DISHWASHERS **70-77** 



REFRIGERATION **36-43** 



REFRIGERATION **78-94** 



TECHNICAL DETAILS

BUILT-IN FREESTANDING

95 96-100 101-108 BUILT-IN INSTALLATION DIAGRAMS

109-112





# BUILT-IN COLLECTION 2014





We invite you to admire the sleek edges, straight lines, smooth surfaces and timeless style that define the Blomberg built-in oven range...

Appreciate the functionality and simplicity and discover the cooking technology provided by Blomberg.

Welcome to the next level of cooking.





# IN HARMONY WITH NATURE

# ENVIRONMENTALLY FRIENDLY

#### 'A' Energy Performance

All Blomberg built-in main ovens are 'A' energy rated, using 20% less energy than standard 'A' rated models.

They offer the best performance with minimum energy consumption.

# IN HARMONY WITH YOU

### **ELEGANT DESIGN**



#### **Practical control panels**

Blomberg offers a variety of easy-to-use control panels. The dials have a stainless steel look, in line with the oven handle.

For a perfect and clean line finish look, some of the Blomberg ovens also feature the push-in pop-out knobs.

The **animated electronic timer** is controlled with practical rotary knobs. The electronic display is easy to use and recommends the most suitable cooking rack level based on the selected cooking function. For improved cooking performance, the ovens also feature a sensitive temperature adjustment in 5°C increments (between 40°C and 280°C).

The Blomberg **digital LED timers** feature easy to view and easy to use symbols and functions. The light of the display panel can be adjusted in 3 different shades and the timer can be set at 3 separate tones, in addition the delay timer option is designed to help you manage your time efficiently.

## **PRACTICAL**

#### Large glass window

It will allow you to see the oven interior without opening the door, avoiding heat and energy loss during the cooking cycle.



#### Telescopic shelf system

The Blomberg oven BEO 9444 X is designed with the telescopic shelf system. The extending arms provide an easier access to the cooking tray. The integrated stop mechanism also guarantees safety when basting and serving dishes.



#### Robust oven door

All Blomberg ovens feature a full glass door that can support heavy dishes and trays up to 22.5 kgs. In addition the new design hinge system allows easy door opening and removal — making the oven cleaning even easier.

Made of stainless steel, the straight and solid handle will create a modern finish look while complementing perfectly the control knobs.



#### **Interior light**

The Blomberg ovens BEO 9414 X and BEO 9444 X feature an interior light with cylindrical lamp placed either on the rear or the sides of the oven cavity. It will give you an easy cooking progress checking without opening the oven door.



The grey coloured cavity surface also helps reduce reflection on the glass door. The same halogen lamp, available on BDO 9564 X provides even more energy-efficient and brighter-white lighting.

#### Recommended shelf level

The electronic timer of your Blomberg oven will indicate the recommended shelf level based on the cooking function you choose. To make the cooking process even easier, the level of each shelf is indicated with a visible number from 1 to 5.

# **IN HARMONY WITH YOU**

### **PRACTICAL**

### **EASY TO CLEAN**

#### Large oven capacity

With 65 litres oven capacity (100 litres combined for double ovens), Blomberg offers one of the most spacious oven interior in its class. It will provide enough room to roast a large turkey or prepare a big feast for your family or friends. The full size tray will also give you optimal cooking space while the deep tray design is ideal for roasting and baking.



#### **Booster function**

The booster function available with BDO 9564 X has been designed to save you time. With this setting, all heating elements are activated at the same time for quick pre-heating, and the oven is heated 35% faster in comparison to standard functions. Once the desired temperature is reached, the oven will automatically switch back to the preset cooking mode.

#### 'Nano' Technology - keeps glass doors clean

With the oleophobic Nano coating on the inner glass door, Blomberg BEO 9444 X single oven maintains its shiny good look for years. Thanks to this special technology, the door simply requires cleaning with soapy water and a soft cloth after every 20 cooking cycles.

#### **Smooth cavity**

With no visible screws or interior points, the Blomberg oven interior gives a shiny and smooth surface. It helps reduce the amount of dirty food in the oven and makes it easier to clean.



#### **Catalytic liners**

All Blomberg ovens have catalytic liners in the oven interior. These absorb cooking grease and reduce food odours, reducing the need for aggressive cleaning and harsh chemicals.

#### Easy Clean enamel

All Blomberg ovens are coated with an 'Easy Clean' grey enamel. This long lasting finish gives an elegant look and allows an easy, quick and ecologic cleaning of the oven cavity and trays.



# IN HARMONY WITH YOU

## SAFE



#### Full glass door

All Blomberg ovens have an easily removable door that is easy to clean with a single wipe. In certain models the glass window is also removable to allow you to clean the glass separately.

#### Easy-to-remove side racks

The side racks fixed to the oven can be easily detached without any tool allowing a complete oven cleaning with minimal effort.

#### Fingerprint free surface

All Blomberg ovens in the range have fingerprint free panel and doors, so you won't have to worry about leaving behind a mark.



#### Recessed grill

The top grill / heater in the Blomberg ovens has been recessed to avoid the risk of self injury while reaching the top shelf. In addition, it minimizes the temperature of the oven handle and knobs for a safe touch.

#### **Key lock**

For complete piece of mind, the Blomberg electronic ovens have a key lock, which allows you to lock the timer settings. The function will prevent accidental pressing of buttons while it is in operation.

# IN HARMONY WITH YOU

### **COOKING FUNCTIONS**



#### Booste

All heating elements are activated for 35% quicker preheating. This function is ideal when you are running short on time.



#### **Bottom heater**

Only the base cooking element is in operation - ideal for slow cooking , pizza, quiches and pastries that require additional heat at the base.



#### Conventional

The top and bottom heating elements are in operation. For even heating from above and below - ideal for stews, casseroles, pastries and meats.



#### Low grill

Only the mid part of the grill is in operation. This is an energy-efficient function designed to grill a small amount of food with minimum energy consumption.



#### Grill

The full grill is in operation. This function is ideal for grilling and browning larger quantities of food.



#### Fan cooking

The circular heater and the fan motor operate together. The heat in the oven is distributed evenly in the centre. In this setting, you can cook 2 or 3 different foods that require the same or similar temperature settings.



#### Grill+fan

The full grill and fan motor operate together. This function is ideal for lean meats and fish.



#### Defros

The fan motor is in operation - Quick and hygienic, ideal for delicate food like quiches which require a lower temperature defrost.



#### Conventional+fan

The bottom and top heating elements operate together with the fan motor. This function is ideal for using the whole oven, with particular focus on browning and base heat.



#### 3D cooking

Top, bottom and central heating elements operate together with the fan motor. Convenient and time saving, this function allows you to cook 3 separate dishes simultaneously on different shelves.



#### Warm keeping

Ideal for keeping the food warm until it is time for serving. It also helps cakes and bread to rise.



#### Pizza

Bottom heating element, circular heater and fan are in operation. This function is ideal for cooking pizza.



#### Slow cooking

The fan motor and central heater operate together. It allows better flavour distribution and helps tenderise many meat dishes through the cooking process as well as saving energy.

### **BUILT-IN DOUBLE OVEN**



### BDO 9564 X

#### Multifunction double oven with programmable animated timer

#### AA Energy rated - 20% more energy efficient than A class

#### **Main Oven Features**

- A Energy rated 20% more energy efficient than A class
- Fully programmable large electronic timer with rotary control
- Large oven capacity 65 It
- 12 cooking functions: Static, static+fan, fan cooking, 3D, pizza, grill+fan, grill, low grill, slow cooking, bottom heater, warm keeping, defrost
- Booster, fast to-the-degree heating
- Electronic temperature control, 5°C sensitive
- 5-level removable side racks
- Interior light with 2 square halogen bulbs
- Catalytic liners mounted on the side wall

#### **Top Oven Features**

- A Energy rated 20% more energy efficient than A class
- Large oven capacity 35lt
- Tilted grill for easy cleaning
- Catalytic liners mounted on the side wall
- 4 cooking functions: Static, bottom heater, low grill, grill
- Interior light

#### **Additional Features**

- Removable full width glass inner door
- Key lock
- Pop in pop out knobs for top oven

#### **Accessories**

- 1 Full size enamel cooking tray with internal grill rack
- 1 Enamel baking tray
- 3 Wire shelves with stop position system

#### **Product Dimensions**

HxWxD: 895x594x567 mm

#### Coloui

Fingerprint free stainless steel with black glass control panel



### **BUILT-IN SINGLE OVEN**





### BEO 9444 X

Fully featured multifunction oven with programmable LED timer

Easy Clean via Oleophobic Nano coating on inner glass doors A Energy rated - 20% more energy efficient than A class

#### **Main Features**

- Fully programmable large LED timer
- Large oven capacity 65 It
- 8 cooking functions: Conventional, conventional+fan, fan cooking, grill+fan, grill, 3D cooking, bottom heater, defrost
- Telescopic shelf system
- Easy clean enamel surface
- 5-level removable side racks
- Interior light with 1 cylindrical halogen bulb

#### **Additional Features**

- Removable full width glass inner door
- Key lock
- Tilted grill for easy cleaning
- Catalytic liners on side wall
- Pop in pop out knobs

#### **Accessories**

- 1 telescopic system with wire shelf for easy access
- 1 full size enamel cooking tray with internal grill rack
- 1 wire shelf with stop position system

#### **Product Dimensions**

HxWxD: 595x594x567 mm

#### Colour

• Fingerprint free stainless steel with black glass control panel









### **BUILT-IN SINGLE OVEN**



### BEO 9414 X

#### Fan oven with programmable LED timer

#### A Energy rated - 20% more energy efficient than A class

#### **Main Features**

- Fully programmable large LED timer
- Large oven capacity 65 It
- 4 cooking functions: defrost, grill+fan, grill, fan cooking
- Easy clean enamel surface
- 5-level removable side racks
- Interior light with 1 cylindrical halogen bulb

#### **Additional Features**

- Key lock
- Tilted grill for easy cleaning
- Catalytic liners on back wall
- Pop in pop out knobs
- Removable full width glass inner door

#### **Accessories**

- 1 full size enamel cooking tray with internal grill rack
- 2 wire shelves with stop position system

#### **Product Dimensions**

HxWxD: 595x594x567 mm

#### Colour

Fingerprint free stainless steel with black glass control panel













# **IN HARMONY WITH YOU**

#### Timer

The timer allows you to set a cooking time for each cooking zone separately. When the cooking time is up, the hob will automatically switch off the zone and a buzzer will signal the end of cooking.



#### **Heat-up and simmering**

With this setting the hob first operates at maximum power for instant heating for a preset time. Then, it automatically switches to a less powerful mode for simmering.



#### Easy to use control panel


Designed with a touch control panel, the Blomberg ceramic hob allows you to set precise temperature and settings. Each heating zone is also operated by a separate touch point meaning they can be individually and easily regulated.





#### **Elegant design**

Blomberg ceramic hob features a scratch-resistant, easy-to clean smooth surface. It is designed with a stainless steel front and back frames and bevelled side edges to withstand everyday use, further enhancing the appearance and functionality of your kitchen.

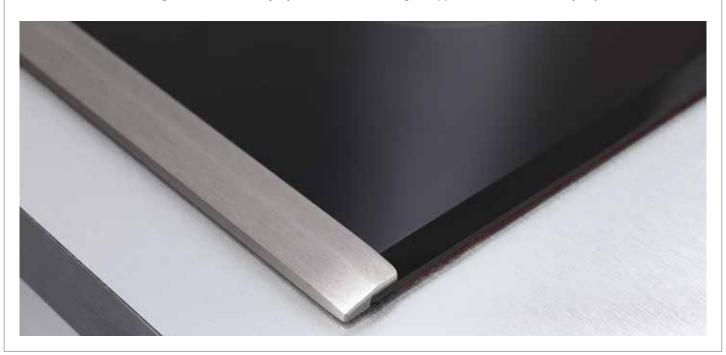

#### Safety features

The **residual heat indicators** will warn you with a visible "H" sign that the cooking zone is not cold enough to touch safely. The **child lock** will prevent accidental pressing of buttons that might change the cooking setting and temperature.

The **anti overflow system** automatically shuts off the power in case of liquid boiling over onto the control panel. Also, the hob will automatically switch off if the zone is left on for a long period of time.





#### Elegant design

The Blomberg gas hob is made of modern stainless steel. The front controls facilitate temperature settings and match the knobs of the Blomberg ovens for a harmonious look in your kitchen.

#### **Under dial instant ignition**

With new and improved control knobs, the ignition is now quicker and easier. Simply press and turn the dial for instant auto ignition and you are ready to cook.



#### Flame safety device

For your total safety and peace of mind, the Blomberg gas hob has a 'flame safety device' fitted as standard. The device senses when the gas has gone out and automatically cuts off the gas.



#### **Practical pan supports**

Blomberg pan supports are cast iron finish and have been designed to guarantee maximum stability and generous spacing between the burners. Their continuous straight design allows you to slide pots and pans from one burner to another very easily.



#### Wok burner

The Blomberg triple crown wok burner reaches an efficient 3800W. It will allow you to cook food rapidly without compromising any nutritional values. The crown ensures that the heat is distributed evenly, resulting in excellent cooking performance over a shorter period of time.





### **BUILT-IN HOBS**

### MIN 54306N

### MKN 54322 X





#### 60 cm Touch control induction hob

#### **Main Features**

- Sleek design touch control display
- Easy Wipe Clean via induction technology
- Precise control via induction technology
- Booster function for quick heating
- Timer and buzzer
- Frameless boarder ceramic surface
- Digital display
- 4 Induction zones
- 1-9 cooking levels per zone
- On / off indicator
- Intellegent pan size recognition
- Individual Timer for all zones
- Heat-up and simmering

#### Safety

- Child lock
- Anti-over flow system
- Individual residual heat indicators
- Automatic stop system

#### **Product Dimensions**

HxWxD: 55x580x510 mm

#### Colour

Black ceramic

#### 60 cm Touch control ceramic hob

#### **Main Features**

- 4 vitroceramic cooking zones including Dual zone and extended zone
- Front and back stainless steel frames
- Bevelled side edges
- Front Touch control with separate touch pads
- 1-9 cooking levels per zone
- Digital display
- Precise heat adjustment
- On / off indicator
- Individual Timer for all zones
- Heat-up and simmering

#### Safety

- Child lock
- Individual residual heat indicators
- Anti-over flow system
- Automatic stop system

#### **Product Dimensions**

HxWxD: 55x580x510 mm

#### Colour

Black ceramic















### GEN 53415 E

### GEN 53403 E





#### 60 cm Front control gas hob

#### **Main Features**

- 4 gas burners including 1 wok burner (3.3 kw wok burner)
- Cast iron pan supports
- Auto ignition front control knobs
- One piece hob surface for easy cleaning

#### Safety

 Flame safety device for all burners

#### **Product Dimensions**

HxWxD: 98x580x510 mm

#### Colour

Stainless steel

#### 60 cm Front control gas hob

#### **Main Features**

- 4 cooking zones with three different burner powers
- Enamel pan supports
- Auto ignition front control knobs
- One piece hob surface for easy cleaning

#### Safety

 Flame safety device for all burners

#### **Product Dimensions**

HxWxD: 10x580x510 mm

#### Colour

Stainless steel

<sup>\*</sup> Picture used as illustration purposes only















# **IN HARMONY WITH NATURE**

# **ENVIRONMENTALLY FRIENDLY**

#### Minimum energy consumption

Blomberg washing machine WMI7462 W20 has been designed to achieve outstanding fabric care and wash results using the least possible amount of detergent, water and electricity. It is A++ energy efficient, **consuming up to 20%** less energy than "A" class models.


#### Automatic water adjustment system

For conservation of water resources, the Blomberg washing machine is equipped with an automatic water adjustment system, which enables your machine to adjust its water intake based on the amount of the laundry.



# **IN HARMONY WITH YOU**


### **PRACTICAL**

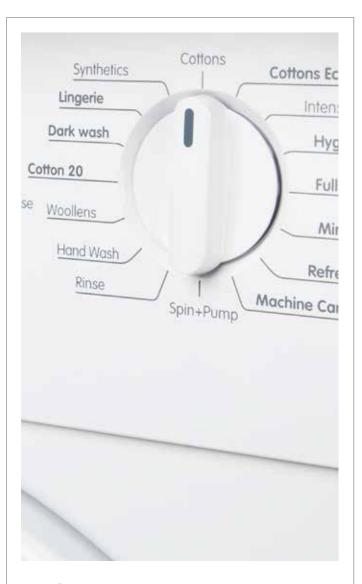

#### Time Saving programmes and functions

The Blomberg WMI7462W20 combines time saving programmes with clever options to give you complete control over your laundry task and therefore maximise your free time. The 'Fast Full Load' will wash a full load in just 39 minutes while the 'Mini 14' will wash 2kg of laundry in just 14 minutes. You can also select the time delay function to allow you to wash at a time convenient for you.



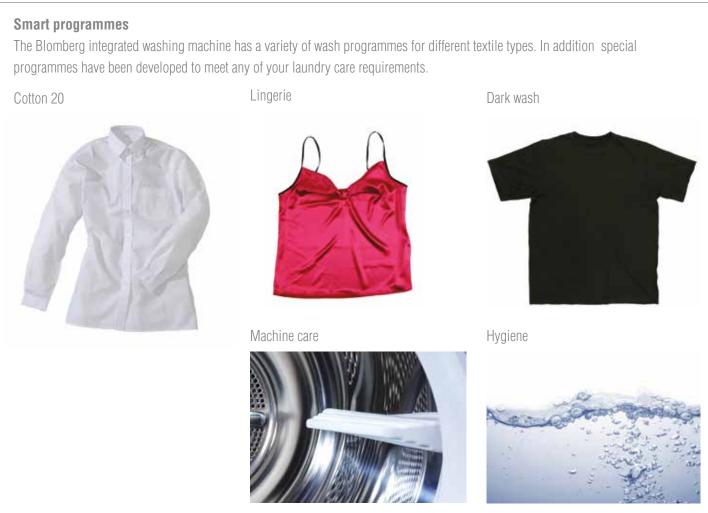

# IN HARMONY WITH NATURE

## SAFE

#### aquAvoid

aquAvoid is an anti-leak system designed to protect your home against flooding. The Blomberg washing machine is equipped with aquAvoid security system, which cuts off the water intake to the machine, should leakage occur from the internal hose



#### **Durable heater**

The Blomberg washing machine is equipped with a special nickel-coated heater. This heater is a hundred times more durable than regular heaters. Thus, it prolongs the life of your washing machine. The heater also eliminates the need for scaling arising from hard water, and consequently saves energy and time while heating the water.

#### **Quality tested**

For long life expectancy, we test 100% of our washing machines before they leave our factory. For maximum durability, 2% of all machines undergo a thorough audit test. Every machine is tested for safety and functionality. Furthermore, Blomberg washing machines are tested continuously for life cycle durability on various programmes.



### **BUILT-IN WASHING MACHINE**





### WMI 7462 W20

#### 7kg Washing Machine

7 kg load capacity; 1600 rpm spin speed A++AA Mini LCD control with time remaining display Variable spin speed and temperature control

#### **Programmes**

 16 programmes including Mini 14', Fast Full Load, Dark Wash, Hygiene, Cotton 20, Refresh, Lingerie

#### **Functions**

Prewash/ Quickwash/ Rinseplus/ Anti crease

#### **Main Features**

- 24 h time delay
- Liquid detergent compartment
- Automatic water adjustment system
- Durable heater

#### Safety

Child lock

#### **Product Dimensions**

HxWxD: 820x600x540 mm













# **IN HARMONY WITH NATURE**

# **ENVIRONMENTALLY FRIENDLY**

#### **Great performance**

The Blomberg dishwashers have "A++AA" rating for energy consumption, cleaning performance and drying level. They will consume up to 20% less energy than standard 'A' class models.



# **IN HARMONY WITH YOU**

### **PRACTICAL**



#### Multi detergent compatible

The Blomberg dishwashers are compatible with all types of liquid, powder and tablet detergents. Regardless of your choice of detergent, your dishwasher will give the same outstanding performance. Furthermore, the detergent container is user friendly and has cross opening lids for an easy refill.

#### Turbo fan drying

Turbo fan drying available on GVN 9483 E is an active ventilation system with increased air circulation. By means of this technology not only does your dishwasher achieve better drying performance but also leaves dishes cool enough to touch at the end of the drying cycle.

#### **Auto Sense system**

Using an advanced technology, the Auto Sense system automatically monitors the dirt level of the dishes and selects the cycle temperature and time accordingly. Simply select the function and your dishwasher will apply the most suitable wash programme with minimum water and energy

#### Multi level wash

The Blomberg dishwashers use a multi level wash system to provide immaculately clean dishes. In this system, two spray arms, placed in the bottom and the middle of the dishwasher, work in coordination with the showerhead at the top spraying water from every direction to reach even the most remote parts of your dishes.





#### Half load

There is no need to wait for both baskets to be fully loaded to start your dishwasher. The half-load option offers complete load flexibility. No matter where you place your dishes, the half load function will wash them thoroughly optimising water consumption according to the dish load.

#### Time saving programmes

programmes in the market, giving you perfect
results every time. The Mini 30' washes
lightly soiled dishes in 30 minutes while the Express
58' programme delivers an amazing "A" cleaning performance in just under an hour, helping you save time and money.



In dishwashers, salt is used to adjust the water hardness level in order to avoid etching marks on delicate glassware. And, for sparkling dishes and glasses, rinse aid adds the finishing



touch. The Blomberg dishwashers have salt and rinse aid indicators that will let you know when it is time for a refill.

#### Flexible upper basket

The Blomberg dishwashers are equipped with the smartRACK, a height-adjustable upper basket, which can be raised to make space for large pans



or plates and baking trays in the bottom basket or lowered to hold tall glasses. This system allows you to adjust the basket height in one simple action, even when the basket is fully loaded. The height adjustable shelves for mugs can be positioned at two separate levels depending on your needs.

# IN HARMONY WITH NATURE

### **EASY TO LOAD**

# IN HARMONY WITH YOU

### SAFE

#### **Practical lower basket**

To maximize space in the lower basket, Blomberg integrated dishwashers are equipped with **folding tines** that are easily folded down for easy placement of large pots and pans.



#### **Quality tested**

We test 100% of Blomberg dishwashers before they leave our factory. For maximum durability, 2% of all machines undergo a thorough test. Every machine is tested for safety and functionality. Furthermore, Blomberg dishwashers are tested for life cycle durability on various programmes.

#### Flow through heater

The heater on the Blomberg dishwashers are concealed to provide a safer and more convenient alternative to an exposed heater. This allows plastic dishware to be placed on the top or bottom baskets without the risk of damage.

#### **Antibacterial seal**

Food and dirt particles collected on the bottom of the dishwasher tank lead to bacteria formation. To maximise hygiene conditions, the dishwasher door is coated with an antibacterial seal that helps reduce bacteria for maximum hygiene.

#### aquaVoid™

In case the float system detects water leakage, safety switch activates the drain pump and deactivates the water inlet valve. The water inside the dishwasher is then discharged.



#### Stainless steel interior

The Blomberg integrated dishwasher have stainless steel high quality interiors that not only protect the machine from heat and corrosion, but also sanitise your dishes with the highest wash temperatures available.

### **BUILT-IN DISHWASHER**



### **GVN 9483 E**

# GVS 9480 X20







#### 60 cm Fully Integrated Dishwasher

#### **Main Features**

- 13 place settings
- **■** A++AA
- LCD Control display

#### **Programmes**

 8 wash programmes: Prewash, Mini 30', Eco 50, A Xpress58', Intensive 70°, Delicate 40°, Hygiene, Auto Wash

#### **Special Functions**

- Half load
- Time delay

#### **Main Features**

- 9 h time delay
- Turbo fan drying
- Salt and rinse aid indicator

#### **Interior Design**

- smartRACK, loaded adjustable upper basket
- Height adjustable shelves for mugs
- Foldable plate supports in the lower basket

#### Safety

- aguAvoid™
- Antibacterial seal

#### **Product Dimensions**

HxWxD: 820x598x550 mm

#### 45 cm Fully Integrated Dishwasher

#### **Main Features**

- 10 place settings
- A++ energy rated
- A class wash in 58 min

#### **Programmes**

8 wash programmes: Prewash, Mini 30', A Xpress58', Eco 50, Hygiene, Auto

#### **Special Functions**

- Half load
- Time delay

#### **Main Features**

- 9 h time delay
- Low 9 It water consumption
- 47 db noise level

#### **Interior Design**

- Folding plate supports in the bottom basket
- Height adjustable basket
- Folding shelves for mugs

#### **Product Dimensions**

HxWxD: 820x450x550 mm

#### Colour

Integrated



















# BUILT-IN REFRIGERATION

The Blomberg refrigeration range of built in appliances has been developed to offer maximum performance, convenience and reliability.


A wide range of practical features, combined with the latest cooling technology, ensure all your cooling needs are met. The style and finish reflect the excellent build quality and design of the collection.





# ENVIRONMENTALLY FRIENDLY

#### "A+" energy efficiency

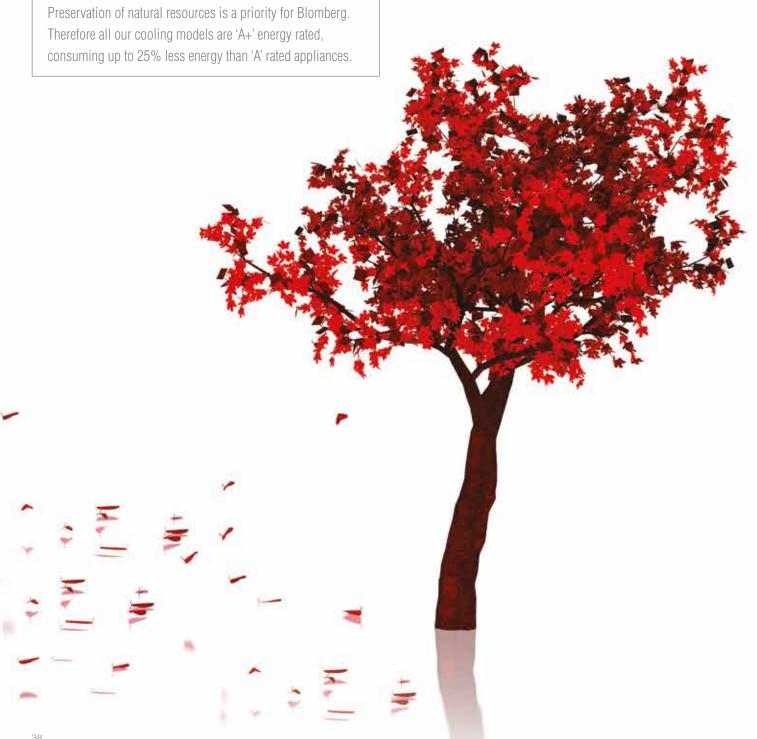

### **FUNCTIONAL**

#### 4-star freezing

 $\times \times \times$ All Blomberg freezers have a 4-star rating, for efficient freezing performance. They can freeze and store food at a minimum temperature of -18°C, and for up to 12 months.

#### **Frost free**

Frost free technology is an advanced cooling system featured in the Blomberg integrated fridge freezers KNM1561i and KNM1551i. Frost free cooling creates a permanently cold environment, eliminating build-up of ice and bacteria in the freezer compartment. You will find food packs do not stick together. And best of all, you will not need to defrost your freezer any more.



#### 0-3°C super fresh zone

The super fresh zone featured in the model KNM1561i maintains the temperature of the compartment just above freezing point and keeps humidity at an optimum level. It ensures that fish and meat retain their vitamin and nutritional values, subtle flavours and a fresh and attractive appearance for twice as long compared to a regular fridge.



### **FUNCTIONAL**



#### Glass shelves

The shelves are made of safety glass, and are highly impact resistant. They help to prevent food and beverages spilling onto lower shelves, making cleaning easier. They can easily be placed on different levels to allow maximum flexibility.

#### smartFIX hinge system

The Blomberg TSM1750u and FSE1630u feature a special hinge system to connect the furniture door to the fridge or freezer door without the need for extra drilling. This system can hold up to 60 kilos and provides easy access to the interior with a 115° door opening.

The heavy duty self closing hinges, means there is no risk of the doors being left ajar.



### SAFE



#### **Transparent freezer drawers**

The front of the freezer drawers in Blomberg models are transparent, to allow you to see the contents clearly, saving time and minimising energy loss.



#### Antibacterial door seals

For maximum hygiene, Blomberg fridge, freezer and fridge freezer door seals are coated with an antibacterial seal to eliminate bacteria.

#### **Quality tested**

We test 100% of our integrated cooling appliances before they leave our factory. For maximum durability, 2% of all machines undergo a thorough test. Every machine is tested for safety and functionality. Furthermore, Blomberg integrated cooling products are tested for life cycle durability on various functions.

### **BUILT-IN REFRIGERATION**

#### KNM 1551 i



#### **Combi Fridge Freezer**

#### 177 cm 280 lt / 9.8 cu ft total gross volume **Frost Free**

#### Fridge

- **=** 190 lt / 6.7 cu ft net volume
- Height adjustable safety glass shelves
- 1 chrome coated wine rack
- Chrome coated door rack accessory

#### Freezer \*\*\*\*

- **48** It / 1.7 cu ft net volume
- 2 transparent drawers + 1 flap transparent drawer
- Freezing capacity: 2,5 kg / 24 h
- Temperature rise time: 13 h

#### **Build Details**

Reversible door

#### **Product Dimensions**

HxWxD: 1770x540x535 mm

#### KNM 1561 i



#### **Combi Fridge Freezer**

#### 177 cm 230 lt / 8.1 cu ft total gross volume **Frost Free**

#### Fridge

- **=** 155 lt / 5.5 cu ft net volume
- Height adjustable safety glass shelves
- 1 chrome coated wine rack
- Chrome coated door rack accessory
- Chiller zone (Super fresh zone)

#### Freezer XXXX

- 62 lt / 2.2 cu ft net volume
- 3 transparent drawers + 1 flap
- Freezing capacity: 3.5 kg / 24 h
- **Temperature rise time: 13 h**

#### **Build Details**

Reversible door

#### **Product Dimensions**

HxWxD: 1770x540x535 mm















TSM 1750 u FSE 1630 u





#### **Built Under Larder Fridge**

### 130 lt / 4.6 cu ft total gross volume

#### Fridge

- **128** It / 4.5 cu ft net volume
- 3 height adjustable glass shelves
- Chrome coated door rack accessory

#### **Build Details**

- Reversible door
- smartFIX, integrated hinge system

#### **Product Dimensions**

■ HxWxD: 813-863x595x545 mm

#### **Built Under Freezer**

### 96 It / 3.3 cu ft total gross volume

#### **Electronic control**

#### Freezer \*\*\*\*

- 87 It net / 3.0 cu ft volume
- 5 separate compartments. 3 drawers, 1 handy rack and concealed basin
- Freezing capacity: 6 kg / 24 h
- Temperature rise time: 19 h

#### **Build Details**

- Reversible door
- smartFIX, integrated hinge system

#### **Product Dimensions**

HxWxD: 813-863x595x545 mm









### **FREE STANDING**

COLLECTION 2014





# FREESTANDING COOKERS

Today, kitchens serve as a place for cooking and dining as well as meeting family and friends. To make this environment as attractive as possible, Blomberg cookers have been specially developed to add a stylish touch to the smartest kitchen.

Designed with inspirational and interactive styles, they will help you to get the best results, so you can prepare delicious meals with joy and ease.



### **ENVIRONMENTALLY FRIENDLY**

#### Minimum energy consumption

All Blomberg ovens in our electric cookers are rated as "A" standard.



### **IN HARMONY WITH YOU**

### **PRACTICAL**

#### Large oven capacities

With 65 litres (electric model) and 61 litres (gas models) in capacity for the main oven, Blomberg offers one of the most spacious oven interiors in its class. It will provide enough room to roast a large turkey or prepare a big feast for your family or friends. The top oven is 35 litres (electric model) and 31 litres (gas model) and provides extra oven capacity when needed. Both gas and electric models top oven can also be used for traditional grilling.

#### Residual heat indicators

Residual heat indicators on the ceramic glass top will warn you if the cooking zone is not cool enough to touch safely.

#### **Interior light**

The Blomberg ovens feature an interior light with cylindrical lamp placed at the rear of the oven cavity ensuring you can monitor the progress of your cooking with ease.

### **PRACTICAL**

#### **Elegant design**

Blomberg cookers have been developed with a careful and detailed design to complement your other Blomberg appliances while giving a harmonious look in your kitchen. With the large display digital timer, symbols and functions are easy to view and use while the oven door interior has a large viewing window for maximum visibility. The handles are made of modern stainless steel (black models) or have a solid metal finish (white models) that will match the clean finish push-in pop-out knobs.





### **EASY TO CLEAN**

#### **Catalytic side panels**

The catalytic side panels absorb cooking grease and fat spits, burning them off at high cooking temperatures - reducing the need of aggressive cleaning and harsh chemicals.





### IN HARMONY WITH YOU

### SAFE

### **COOKING FUNCTIONS**

#### Flame failure safety device

For your total safety and peace of mind, the Blomberg gas hob has a 'flame safety device' fitted as standard. The device senses when the gas has gone out and automatically cuts off the gas.



#### failure

#### **Residual heat indicators**

Residual heat indicators on the ceramic glass top will warn you if the cooking zone is not cool enough to touch safely.



#### Auto - shut off

The Blomberg gas cooker is equipped with a glass lid that will provide a safety automatic shut off.

The supply of gas is cut off if the lid is accidentally closed with the burners still on.



#### **Conventional Oven Cooking**

Elements at the top and bottom of the oven provide heat to the cavity. Conventional ovens are ideal for stews, pastries and baking and the centre of the oven is the hottest.



#### Grill

This function is ideal for grilling and browning larger quantities of food.



#### **Fan Cooking**

Fan cooking uses a fan to blow the heat created by the oven element around the cavity. This ensures the temperature is even a consistent throughout the cavity. In this setting, you can be sure your food will be cooked to perfection which ever oven shelf is uses. Fan cooking also allows for faster cooking, usually at slightly lower temperatures.



### **COOKERS**



#### HKN 9310 / HKN 9310 Z

#### 60 cm electric cooker

#### Double oven with easy clean ceramic hob

#### **Main Features**

- Main Fan oven for more even heat distribution
- Secondary oven for extra capacity when its needed
- Easy to clean Ceramic hob with hot hob indicators

#### Main Oven

- "A" energy rated
- Large oven cavity 65 lt
- Fully programmable Digital timer
- Side panels with self clean Catalytic liners
- Interior light
- Removable full inner glass door
- 5 shelf positions

#### Top oven

- "A" energy rated
- Large oven capacity 35 It
- Integrated recessed grill
- Side panels with self clean Catalytic liners
- Interior light

#### Hob

- 4 ceramic rapidlite cooking zones
- Push in pop out knobs
- Residual heat indicators

#### **Accessories and additional features**

- Deep cooking tray main oven
- Standard cooking tray top oven
- 3 wire shelves with stoppers
- Adjustable feet

#### **Product Dimensions**

HxWxD: 90x60x60 cm

#### Colours

- White HKN9310
- Black HKN9310Z















#### GGN 9351 Z

#### 60 cm gas cooker

#### Double oven with gas hob

#### **Main Features**

- Large main gas oven with traditional burner
- Secondary gas oven for extra capacity when its needed
- 4 burner hob with glass lid for extra workspace

#### Main Oven

- Large oven cavity 61 It
- Fully programmable Digital timer
- Side panels with self clean Catalytic liners
- Interior light
- Removable full inner glass door
- 5 shelf positions

#### Top oven

- Large oven capacity 31 It
- Integrated recessed grill
- Side panels with self clean Catalytic liners
- Interior light

#### Hob

- 4 gas burners
- Flame Safety device on all burners
- Cast iron pan supports
- Auto shut off glass lid

#### **Accessories and additional features**

- Deep cooking tray main oven
- Standard cooking tray top oven
- **3** wire shelves with stoppers
- Adjustable feet

#### **Product Dimensions**

HxWxD: 90x60x60 cm

#### Colour

■ Black - GGN9351Z









# FREESTANDING WASHING MACHINES

Combining great performance with an exquisite design, Blomberg washing machines bring a new dimension to laundry care. Designed to provide perfect wash results with the most efficient use of energy and water, Blomberg washing machines are stylish, high performing and easy to use.



### **ENVIRONMENTALLY FRIENDLY**

#### Minimum energy consumption

All Blomberg washing machines have been designed to achieve outstanding fabric care and wash results using the

lowest possible amount of detergent, water and electricity. All Blomberg washing machines are at least "A+" energy rated, and achieve "A" wash performance.

### **PRACTICAL**


#### **Smart controls**

Blomberg washing machines feature a large control panel, fully electronic controls and intelligent programmes controlled by a single dial knob, for simple programme selection.



#### Slim depth for easy installation

Blomberg features slim depth washing machines for tight spaces and cupboards. It will ensure a flush finish with the kitchen units.



#### Extra large porthole

To make loading and unloading of large items easier, the new Blomberg 8 kg WNF 8441 AE20 & 9kg WNF 9448 AE20 washing machines have a 34 cm extra large door that opens to 165°.



#### Automatic water adjustment system

For conservation of water resources, Blomberg washing machines are built with an automatic water adjustment system, which enables your machine to adjust its water intake based on the amount of the laundry.

### **PRACTICAL**

#### Time saving programme and functions



Mini 14' programme has been developed to maximise your free time. Your machine will wash a 2 kg load of lightly soiled clothes in only 14 minutes.

#### **Smart programmes**

Blomberg washing machines offer a variety of wash programmes for different textile types. In addition to the common programmes for cottons, synthetics, and mixed fabrics, Blomberg offers special programmes that can be used for special needs.

Woollens



Fast full load



Refresh



Hand wash



Dark wash



Lingerie




### **PRACTICAL**

#### **Durable heater**

Large capacity Blomberg washing machines are equipped with a special nickel-coated heater. This heater is a hundred times more durable than regular heaters. Thus, it prolongs the life of your washing machine. The heater also eliminates the need for scaling due to hard water, and consequently saves energy and time while heating the water.



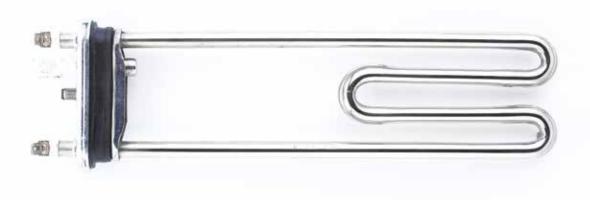

#### aquAvoid

aquAvoid is an anti-leak system designed to protect your home against flooding. All Blomberg washing machines are equipped with the aquAvoid security system, which cuts off the water intake to the machine should leakage occur from the internal hose.



#### **Child lock function**

For maximum security, Blomberg washing machines have a child lock. Once the **child lock** is activated, any alteration to the selected settings is ignored, and therefore the programme won't be changed accidentally.

#### **Quality tested**

For long life expectancy, we test 100% of our washing machines before they leave our factory. For maximum durability, 2% of all machines undergo a thorough audit test. Every machine is tested for safety and functionality. Furthermore, Blomberg washing machines are tested continuously for life cycle durability on various programmes.

### **WASHING MACHINES**

#### WNF 9448 AE20



#### 9 kg Washing Machine

9 kg load capacity; 1400 rpm spin speed Optima Inverter Motor Mini LCD display

#### **Programmes**

 16 programmes including:
 Mini 14', fast full load, spin & drain, hand wash, lingerie, bedding

#### **Functions**

Prewash / No spin / Anti Crease / Rinse plus

#### **Main Features**

- A++ energy efficiency
- 24 h time delay and remaining time display
- Automatic Half Load
- 34 cm XL porthole diameter
- Fully Variable Spin Speed and Temperature Selection
- Overflow protection

#### Safety

- aguAvoid™
- Child lock with indicator light
- No water warning indicator light

#### **Product Dimensions**

HxWxD: 840x600x620 mm

#### Colour

White with silver fascia













#### WNF 8441 AE20



#### 8 kg Washing Machine

8 kg load capacity; 1400 rpm spin speed Variable spin speed and temperature control Mini LCD control with time remaining display

#### **Programmes**

16 programmes including:
 Mini 14', fast full load, intensive, handwash, woollens, lingerie

#### **Functions**

Prewash / Quickwash / Rinseplus / Anti crease

#### **Main Features**

- A++ energy efficiency
- 24 h time delay and remaining time
- No spin, rinse hold selection
- Automatic water adjustment system
- 34 cm XL porthole diameter
- Durable heater

#### Safety

- aguAvoid™
- Child lock with indicator light
- No water warning indicator light

#### **Product Dimensions**

HxWxD: 840x600x550 mm

#### Colour

White with silver fascia













# 3YEAR WARRANTY

#### WNF 7341 A



#### 7 kg Washing Machine

7 kg load capacity; 1400 rpm spin speed Variable spin speed and temperature control Digital display with time remaining display

#### **Programmes**

 11 programmes including: Mini 14', dark wash, hand wash, woollens, shirts, sportswear

#### **Functions**

Prewash / Quick wash / Rinse plus / Rinse hold

#### **Main Features**

- A+ energy efficiency
- Digital display showing time remaining
- 19 hr time delay
- Variable spin speed and temperature
- Automatic water adjustment system
- **=** 34 cm XL porthole diameter
- Durable heater

#### Safety

- aquAvoid<sup>™</sup>
- Child lock
- No water warning indicator light

#### **Product Dimensions**

HxWxD: 840x600x550 mm

#### Colour

White with silver fascia

#### WNF 6221



#### 6 kg Washing Machine

6 kg load capacity; 1200 rpm spin speed Variable spin speed and temperature control LED indicator lights

#### **Programmes**

 11 programmes including: Mini 14', dark wash, hand wash, woollens, shirts, sportswear

#### **Functions**

Prewash / Quick wash / Rinse hold

#### **Main Features**

- A+ energy efficiency
- **3** / 6 / 9 hr time delay
- Variable spin speed and temperature
- Automatic water adjustment system
- **3**0 cm porthole diameter
- Durable heater

#### Safety

- aquAvoid™
- Child lock

#### **Product Dimensions**

HxWxD: 840x600x510 mm

#### Colour

White



















### **WASHING MACHINES**



#### WNF 5200

#### 5 kg Washing Machine

5 kg load capacity; 1000 rpm spin speed Programme progress indicator lights Variable spin speed and temperature control

#### **Programmes**

15 programmes including:
 Mini 14', hand wash, sportswear, shirts

#### **Functions**

Shorter Wash / No spin / Pre-Wash / Rinse hold

#### **Main Features**

- A+ energy efficiency
- 9 hr time delay
- 30 cm porthole diameter
- Programme progress indicator lights

#### Safety

- aquAvoid™
- Child lock

#### **Product Dimensions**

HxWxD: 850x600x470 mm

#### Colour

White













# ENVIRONMENTALLY FRIENDLY

#### Minimum energy consumption

The Blomberg TKF 8451 AG50 heat pump tumble dryer uses 70% less energy compared to an average condenser tumble dryer C energy rated.



# IN HARMONY WITH THE FUTURE

# ADVANCED TECHNOLOGY

#### Heat pump technology




Blomberg dryer range features an innovative dryer with heat pump technology. Heat pump systems have been widely used in air conditioning for many years. This technology transports energy from one environment to another, for more efficient heating.

A heat pump dryer is a combination of a condensing dryer and an air conditioner. The evaporator in the heat pump system does the work of the condenser, drying the saturated air. The condenser in the heat pump system is used to heat the air that dries the laundry. This closed loop system is a very energy-efficient way to dry laundry and condense the water from it. By means of this energy-efficient heat exchange system, the air temperature inside the drum is considerably lower compared to conventional dryers.

By means of this system heat pump dryers consume minimum amount of energy. Blomberg's heat pump model TKF8451 AG50 is A++ energy rated and consumes 70% less energy compared to a C class model.

Furthermore, by maintaining a relatively low temperature and with an advanced drum movement, Blomberg heat pump dryer allows you to dry more delicate items. Since the laundry's average temperature is kept around  $55^{\circ}\text{C}$  — much lower than the temperature of the air used in conventional air-vented and condenser dryers — heat pump dryers are safer and gentler to your laundry than standard dryers. Lower temperature means there's a much lower risk of hot air injury when you open the dryer during the cycle to put extra items in.



### **PRACTICAL**

#### Special drum paddles

With their unique forms, the special drum paddles ensure more homogenous drying and creasing. Moreover, they will prevent any tangling problems of big items, such as bed sheets.



#### **Anti-crease**

The anti crease cycle separates and smooths your laundry after the drying cycle, by means of a gentle drum action; so it is wrinkle free and ready to wear.



### Large capacity and porthole

With 8 kg capacity, the Blomberg condenser tumble dryers allow you to dry large loads in one cycle. To make loading even easier, they are designed with a 39.5 cm large door that opens to 150°.



#### Easy access fluff filter

The fluff filter collects the fluff that is produced when clothes are dried. It is located on the front of the machine allowing easy access. With its wide handle, it is easily removed and cleaned, and its large surface area improves the drying performance of your machine.



#### Reverse action drum

To minimise creasing, the drum automatically reverses during the drying cycle.



### SAFE

#### Auto cool-down

Cool air is blown at the end of the cycle, so the clothes are not too hot to handle when the machine is unloaded.

#### Sensor drying

The Blomberg tumble dryers feature a combination of moisture and temperature sensors, which automatically determine when the clothes are dry, preventing damage from over-drying. The sensors allow you to reach the right level of dryness for different types of fabrics.

#### Easy-to-reach water tank

With its side opening door cover, the Blomberg tumble dryers provide an easy access to the water tank for increased ergonomics and ease of use.

#### Interior drum

The Blomberg tumble dryers are equipped with interior light; so even the smallest items of laundry will not be left inside.

#### Child lock

Once activated, the child lock option will eliminate any accidental pressing of buttons that might change the pre-set programme.

#### **Warning indicators**

The Blomberg tumble dryers have a series of warning indicator lights that will remind you when the filter needs to be cleaned, the water tank to be emptied and when to clean the condenser. The end of cycle buzzer will inform you when the drying programme ends, while you will also have the option to stop it by pressing the buzzer button.

#### **Quality tested**

For long life expectancy, we test 100% of our tumble dryers before they leave our factory. For maximum durability, 2% of all the machines undergo a thorough audit test. Every machine is tested for safety and functionality.



### **TUMBLE DRYERS**

#### TKF 8451 AG50



#### **TKF 8431**



#### **Heat Pump Dryer**

#### 8 kg load capacity Mini LCD control display A++ energy rated

#### **Programmes**

16 programmes including:
 Refresh, shirts, jeans, bedding, shirts 30'

#### **Main Features**

- Automatic sensor drying
- 1-24 hr time delay
- Large door for easy loading/unloading
- Interior drum light
- Bi-directional drum action
- Auto cool-down
- Anti-creasing cycle option

#### Safety

- Child lock
- End of cycle buzzer
- Warning indicators: Child lock, clean filter, water-tank full

#### **Product Dimensions**

HxWxD: 850x600x600 mm

#### Colour

• White with Silver Fascia

#### Condenser drying

8 kg load capacity Mini LCD control display B energy rated

#### **Programmes**

16 programmes including:
 Refresh, Jeans, Shirts, Lingerie

#### **Main Features**

- Time delay of up to 24 hours
- Large porthole door with large door opening
- Sensor programmes
- Automatic anti-creasing feature
- Reverse action drum
- Auto Cool down phase
- Large Capacity

#### Safety

- End of cycle buzzer
- Child lock
- Warning indicators: Child lock, clean filter, water-tank full

#### **Product Dimensions**

HxWxD: 850x600x600 mm

#### Colour

White

















### **ENVIRONMENTALLY FRIENDLY**

#### Great performance - A+AA

The Blomberg dishwasher range has "A+" ratings for energy consumption and "A" for washing performance and drying effectiveness.

#### Low noise level

The new Blomberg GSN 9476 A is one of the quietest dishwasher on the market offering a low noise level at 43 dBA.





### **IN HARMONY WITH YOU**

### **PRACTICAL**

#### **Smart controls**

The Blomberg dishwashers are equipped with easy-touse fully electronic controls. The GSN 9476 A features an interactive LCD display that allows you to monitor the progress of your wash programme. As well as displaying the time remaining of the chosen programme, it allows you to set time delay function up to 24 hours.

#### Multi level wash

The Blomberg dishwashers use a multi level wash system to provide immaculately clean dishes. In this system, three spray arms, placed in the bottom, the middle and at the top of the dishwasher, work in coordination spraying water from every direction to reach even the most remote parts of your dishes.



#### Time saving

We continually try to minimise the duration of wash cycles to maximise your free time. Therefore, Blomberg offers some of the shortest programmes in the market. Mini 30' cleans lightly soiled dishes in 30 minutes. A express 58' programme delivers "A" washing performance in 58 minutes.



# **PRACTICAL**

# IN HARMONY WITH YOU

# **EASY TO UNLOAD**

# Multi detergent compatible

The Blomberg dishwashers are compatible with all kinds of liquid, powder and tablet detergents.
Regardless of your choice of detergent, your



dishwasher will give the same outstanding performance. Furthermore, the detergent container is user friendly and has cross opening lids for an easy refill.

#### Half load

There's no need to wait for both baskets to be fully loaded to start your dishwasher. The half-load option offers complete load flexibility. No matter where you place your dishes, the half load function will wash them thoroughly optimising water consumption according to the dish load.



#### Salt and rinse aid indicators

In dishwashers, salt is used to adjust the water hardness level in order to avoid etching marks on delicate glassware. And, for sparkling dishes and glasses, rinse aid adds the finishing touch. The Blomberg dishwashers have salt and rinse aid indicators that will let you know when it is time for a refill.

#### Flexible upper basket

The Blomberg dishwashers are equipped with smartRACK,a height-adjustable upper basket, which can be raised to make room for pans, large plates and baking trays in the bottom basket or lowered to hold tall glasses. This system allows you to adjust the basket height in one simple action, even when the basket is fully loaded.

The upper basket also features **height adjustable shelves for mugs** that can be positioned at two separate levels depending on your needs.

#### Practical lower basket

To maximise space in the lower basket the Blomberg dishwashers feature **folding tines** that are easily folded down for easy placement of large pots and pans.



#### Sliding cutlery basket

The Blomberg dishwasher's cutlery basket slides easily along the tilting tines in the lower basket for flexible placement.

# **EASY TO UNLOAD**

# IN HARMONY WITH YOU

# SAFE

#### Stainless steel interior

The Blomberg dishwashers have stainless steel high quality interiors that not only protect the machine from heat and corrosion, but also sanitise your dishes with the highest wash temperatures available.



#### **Antibacterial seal**

Food and dirt particles collected on the bottom of the dishwasher tank lead to bacteria formation.

To maximise hygiene conditions, the dishwasher door is coated with an antibacterial seal that helps reduce bacteria for maximum hygiene.



#### **Quality tested**

We test 100% of Blomberg dishwashers before they leave our factory. For maximum durability, 2% of all machines undergo a thorough test. Every machine is tested for safety and functionality. Furthermore, Blomberg dishwashers are tested for life cycle durability on various programmes.

#### Flow through heater

The heater on the Blomberg dishwashers are concealed to provide a safer and more convenient alternative to an exposed heater. This allows plastic dishware to be placed on the top or bottom baskets without the risk of damage.

#### Brushless DC™ Motor (BLDC Motor)

The GSN 9476 A introduces the BLDC Motor which brings energy and water consumption efficiency while performing quietly in the background.



# SAFE

#### **DMFS**

DMFS (double motion float system) is an enhanced anti-leak system designed to provide maximum security against water damage with minimum service cost. It is an intelligent mechanism, available with the Blomberg dishwashers, that detect the source of excess water collection. In this system, there are two float agents. In minor amounts of water collection, the first agent activates the drain pump, and the machine continues to run until the cycle is complete eliminating an unnecessary visit by a service engineer. If there is an operational problem, the second float agent is involved, which alerts the aquAvoid<sup>TM</sup> plus system to turn off the water supply, and shuts off the machine.



# **DISHWASHER**



#### **GSN 9476 A**

60 cm Full Size Dishwasher With LCD control display

#### A+AA

13 place settings Brushless DC Motor - efficient and quiet performance Low water consumption - 10 litres

#### **Programmes**

- 7 wash programmes:
   Prewash, mini 30', eco 50°, A Xpress58', intensive 70°, delicate 40,
   Auto 40-65°C
- 6 wash temperatures

#### **Main Features**

- Whisper Quiet performance at 43 dB
- 24 h time delay
- Half load
- Turbo fan drying
- Salt and rinse aid indicator

#### **Interior Design**

- smartRACK, loaded adjustable upper basket
- Height adjustable shelves for mugs
- Foldable plate supports in the lower basket

#### Safety

- aquAvoid<sup>™</sup> plus
- DMFS double motion float system
- Antibacterial seall

#### **Product Dimensions**

HxWxD: 850x600x600 mm

#### Colour

White

















#### **GSN 9122**

#### 60 cm Full Size Dishwasher

#### A+AA

12 place settings LED indicator lights

#### **Programmes**

5 wash programmes:
 Prewash, mini 30', eco 50°, A express 58', intensive 70°

#### **Special Functions**

- Half load
- Time delay

#### **Main Features**

- 48 dBA noise level
- **3** / 6 / 9 hr time delay
- LED progress indicator lights
- Salt and rinse aid indicators

#### **Interior Design**

- FlexiRACK, loaded adjustable upper basket
- Height adjustable shelves for mugs
- Foldable plate supports in the lower basket

#### Safety

- aquAvoid<sup>™</sup>
- DMFS double motion float system
- Antibacterial seal

#### **Product Dimensions**

HxWxD: 850x600x600 mm

#### Colour

White













# FRENCH DOOR-FRIDGE FREEZER

# **FEATURES**



#### **Electronic display with touch control**

The electronic control display allows accurate temperature settings with the use of touch control buttons. The **quick cool** and **fast freeze** functions enable you to quickly boost the temperature level of the fridge or the freezer.

The Eco functions are designed to minimise energy consumption. When the fridge doors remain closed for 6 consecutive hours, and the electronic settings are left unaltered, the fridge compartment automatically goes to 'Energy saving' mode. In this mode the temperature in the freezer drawers is preserved at -18°C. If you go on holiday, the 'holiday' mode can save you energy by reducing the fridge temperature.

#### **Frost Free**

Frost Free creates an ideal and permanently cold environment to store fresh and frozen food while eliminating build-up of ice and bacteria in the freezer. You will find that food packs do not stick together and best of all, you won't need to defrost your freezer any more.



#### Freezer drawers

Carefully designed to ensure that the look of your fridge freezer is different and stylish, the KFD 9952 PXD features 2 freezer drawers for flexible storage solutions. Offering a large volume, they can store bulky and tall items with ease.

#### Automatic ice maker

The KFD 9952 PXD can be plumbed into your water supply to give you chilled water on tap and the automatic ice maker will keep you in good supply of ice cubes.



# FRENCH DOOR FRIDGE FREEZER





#### KFD 9952 PXD

84 cm French Door Fridge Freezer

600 lt / 21.2 cu.ft total gross volume Fully Frost free Electronic display with touch buttons

#### Fridge

- **395** It / 14.0 cu.ft net volume
- Blue zone technology
- 0-3°C Super Fresh zone
- Chilled water dispenser (water filter supplied)
- Height adjustable glass shelves
- Chrome door rack
- 2 transparent crisper drawers

#### Freezer XXXX

- **154** It / 5.4 cu.ft net volume
- Automatic ice maker in upper drawer (water filter supplied)

#### Hvaiene

Antibacterial door seal

#### **Technical Information**

■ Dimensions (HxWxD): 182x84x74.5 cm (incl. handle protrusion)

#### Colour

Stainless steel - KFD 9952 PXD













# IN HARMONY WITH NATURE

# ENVIRONMENTALLY FRIENDLY

#### Minimum energy consumption

Preservation of natural resources is a priority for Blomberg, where not only production facilities are environment conscious, but also all products. All Blomberg cooling models are "A+" rated using up to 25% less energy than "A" rated models, helping you save money and energy.

# IN HARMONY WITH YOU

# **FUNCTIONAL**

#### 'Food Protector' technology

Blomberg's innovative 'Food Protector' technology uses an electronic temperature control system ensuring the freezer compartment carries on working even when ambient temperatures plummet. The system will keep the freezer working in ambient temperatures as low as -15°C and therefore

As well as giving piece of mind, you will have the opportunity to locate your Blomberg Frost Free fridge-freezer or freezer in the kitchen, or anywhere else in the home (such as the garage).

ensures that frozen food is protected.





# **FUNCTIONAL**



#### **Frost Free**

Frost free technology is an advanced cooling system featured in selected Blomberg fridge freezers. Frost free cooling creates a permanently cold environment, eliminating build-up of ice and bacteria in the freezer. You will find food packs do not stick together and best of all, you won't need to defrost your freezer any more.



#### 4-star freezing

All Blomberg freezers have a 4-star rating for efficient freezing performance. They can freeze and store food at a minimum temperature of -18°C, and for up to 12 months.



#### **Electronic controls**

The electronic controls featured in the FNT 9673 P allow accurate temperature settings. The **Fast freeze** function enables you to boost and restore the temperature level of the freezer quickly after placing large amounts of fresh food inside. Furthermore, there is an integrated alarm system that will warn you if the door is accidentally left ajar.



#### 0-3°C super fresh zone

The super fresh zone that is featured in the SOM 9673 P maintains the temperature of the compartment just above freezing point and keeps humidity at an optimum level. It should ensure that fish and meat retain their vitamin and nutritional values, subtle flavours and a fresh, attractive appearance for twice as long compared to a regular fridge.

# IN HARMONY WITH NATURE

# **PRACTICAL**

#### Glass shelves

The shelves are made of safety glass, and are highly impact resistant. They help to prevent food and beverages spilling onto the lower shelves, making cleaning easier. They can be placed on different levels to allow for maximum flexibility.



#### Transparent and telescopic drawers

The fronts of the crisper and freezer drawers are transparent to allow you to see the contents clearly, saving time and minimising energy loss. Telescopic drawers featured in certain models provide easier access to the refrigerator contents.



# Twist and serve ice cube tray

With Blomberg's twist and serve ice cube tray, your ice will be ready in three simple steps: Fill with water, leave to freeze, then simply twist. The ice cubes will be collected in the tray underneath.







#### Maximum space

Blomberg tall freezer FNT 9673 P offers a variety of storage solutions. You can have easy access to small items in your freezer by means of the practical "in door' compartments. There is also a large capacity freezer compartment – ideal for the storage of large items, and the freezer tray located inside the drawer is ideal for freezing soft fruits, such as berries. And if you still need space, the middle shelf between the two top drawers is removable to allow you to store even larger items.





# IN HARMONY WITH NATURE

# **SAFE**

#### **Antibacterial door seals**

For maximum hygiene, Blomberg fridge, freezer and fridge-freezer door seals are coated with an antibacterial seal that eliminates bacteria.



#### **Quality tested**

We test 100% of our refrigerators before they leave our factory. For maximum durability, 2% of all our machines undergo a thorough test. Every machine is tested for safety and functionality. Furthermore, Blomberg refrigerators are tested for life cycle durability on various functions.









#### KGM 9690 P / KGM 9690 PX

70 cm Combi Fridge Freezer

410 lt / 14.5 cu.ft total gross volume Frost Free Twist and serve ice cube trays

#### Fridge

- **230** lt / 8.2 cu.ft net volume
- 2 transparent salad crispers
- Glass shelves
- Transparent door racks
- Chrome coated bottle retainer
- Chrome coated wine rack
- Soft opening storage box under door rack

#### Freezer \*\*\*\*

- **118** It / 6.0 cu.ft net volume
- Frost Free
- Freezer works in ambient temperatures down to -15°C
- Twist & serve ice cube tray
- 3 full width transparent drawers, one is half depth
- 1 top drawer with twist and serve trays

#### Hygiene

Antibacterial door seal and handles

#### **Technical Information**

- Reversible doors
- Dimensions (HxWxD): 191x70x60 cm

#### Colour

- White KGM9690P
- Stainless steel KGM9690PX













#### KGM 9680 P

#### 60 cm Combi Fridge Freezer

315 It / 11.1 cu.ft total gross volume Frost free Twist and serve ice cube trays

#### Fridge

- **175** lt / 6.2 cu.ft net volume
- 1 transparent salad crisper
- Glass shelves
- Transparent door racks
- Chrome coated bottle retainer
- Chrome coated wine rack
- Interior light

#### Freezer XXXX

- 94 lt / 3.3 cu.ft net volume
- Frost free
- Freezer works in ambient temperatures down to -15°C
- Slimline storage tray
- Twist & serve ice cube tray
- 3 full depth transparent drawers, one is half width
- 1 half depth plastic transparent drawer

#### Hygiene

Antibacterial door seal and handles

#### **Technical Information**

- Reversible doors
- Dimensions (HxWxD): 190.5x59.5x60 cm

#### Colour

- White KGM 9680 P
- Stainless steel KGM 9680 PX











#### KGM 9550 P / KGM 9550 PX

#### 55 cm Combi Fridge Freezer

300 lt / 10.5 cu.ft total gross volume Frost free

Chrome coated wine rack

#### Fridge

- 157 lt / 5.5 cu.ft net volume
- 1 transparent salad crisper
- Glass shelves
- Transparent door racks
- Chrome coated wine rack
- Interior light

#### Freezer XXXX

- 87 lt / 3.1 cu.ft net volume
- Frost free
- Freezer works in ambient temperatures down to -15°C
- Ice bank tray
- Top compartment with drop-down flap
- 2 full depth plastic transparent drawers
- 1 half depth plastic transparent drawer

#### Hygiene

Antibacterial door seal

#### **Technical Information**

- Reversible doors
- Dimensions (HxWxD): 182x54.5x60 cm

#### Colour

- White KGM 9550 P
- Stainless steel KGM 9550 PX











#### KGM 9530 P

#### 55 cm Combi Fridge Freezer

240 lt / 8 cu.ft total gross volume Frost free

**Antibacterial door seals** 

#### Fridge

- **134** It / 4.7 cu.ft net volume
- 1 transparent salad crisper
- Glass shelves
- Transparent door racks
- Interior light

#### Freezer \*\*\*

- 63 lt / 2.2 cu.ft net volume
- Frost free
- Freezer works in ambient temperatures down to -15°C
- Ice bank tray
- Top compartment with drop-down flap
- 1 full depth plastic transparent drawers
- 1 half depth plastic transparent drawer

#### Hygiene

Antibacterial door seals

#### **Technical Information**

- Reversible doors
- Dimensions (HxWxD): 152x54.5x60 cm

■ White - KGM 9530 P







# TALL LARDER FRIDGE





#### SOM 9673 P

#### 60 cm Tall Larder Fridge

415 lt / 14.6 cu.ft total gross volume Super fresh zone Chrome coated wine rack

#### Fridge

- **a** 367 lt / 12.9 cu.ft net volume
- Auto defrost function
- Telescopic 0-3°C super fresh zone
- 1 transparent salad crisper
- Glass shelves
- Transparent door racks
- Chrome coated wine rack
- Interior LED light

#### Hygiene

Antibacterial door seal and handle

#### **Technical Information**

- Reversible door
- Dimensions (HxWxD): 171x60x65 cm

#### Colour

■ White - SOM 9673 P

#### **Matching Freezer**

■ FNT 9673 P





# **TALL FREEZER**





#### FNT 9673 P

#### 60 cm Tall Freezer

#### 290 lt / 10.2 cu.ft total gross volume Frost free LED display

#### Freezer XXXX

- **255** It / 9.0 cu.ft net volume
- Frost free
- Fast freeze function
- Twist & serve ice cube tray
- 4 full depth plastic transparent drawers including big drawer compartment
- 1 half depth plastic transparent drawer
- 2 transparent flaps
- 2 door pockets storage
- Works in ambient temperatures down to -15°C

#### Hygiene

Antibacterial door seal and handle

#### **Technical Information**

- Reversible door
- Dimensions (HxWxD): 171x60x65 cm

#### Colour

■ White - FNT 9673 P

#### **Matching Larder Fridge**

■ SOM 9673 P



# **UNDERCOUNTER FRIDGES**



#### TSM 1551 P







#### **Undercounter Larder Fridge**

**Undercounter Fridge with 4-Star Freezer** 

#### 135 lt / 4.8 cu.ft total gross volume

#### 120 lt / 4.2 cu.ft total gross volume

#### Fridge

- **130** It / 4.6 cu.ft net volume
- Transparent crisper
- Glass shelves
- Chrome coated bottle retainer

#### Hygiene

Antibacterial seal

#### **Technical Information**

- Reversible door
- Handle supplied with appliance, to be fitted separately
- Dimensions (HxWxD): 85x54.5x60 cm

#### Colour

■ White - TSM 1551 P

#### **Matching Freezer**

■ FNE 1531 P

#### Fridge

- 101 lt / 3.5 cu.ft net volume
- Transparent crisper
- Glass shelves
- Chrome coated bottle retainer

#### Freezer \*\*\*\*

- **1**3 lt / 0.5 cu.ft net volume
- 1 ice cube tray

#### Hygiene

Antibacterial seal

#### **Technical Information**

- Reversible door
- Handle supplied with appliance, to be fitted separately
- Dimensions (HxWxD): 85x54.5x60 cm

#### Colour

■ White - TSM 1541 P









# **UNDERCOUNTER FREEZERS**

### FNE 1531 P



#### **Undercounter Freezer**

# 90 lt / 3.2 cu.ft total gross volume Frost Free

#### Freezer \*\*\*\*

- **To a serior of the serior of**
- Fast freeze function
- Indicator lights
- Ice bank tray
- 2 full depth transparent drawers
- 1 half depth plastic transparent drawer
- Works in ambient temperatures down to -15°C

#### Hygiene

Antibacterial seal

#### **Technical Information**

- Reversible door
- Handle supplied with appliance, to be fitted separately
- Dimensions (HxWxD): 85x54.5x60 cm

#### Colour

■ White - FNE 1531 P

#### **Matching Larder**

■ TSM 1551 P











# **TECHNICAL DETAILS**

BUILT-IN 96-100 FREESTANDING 101-108

# **BUILT-IN OVENS**

MODEL CODE	BDO 9564X	BEO 9444 X	BEO 9414X
Туре	Multifunction Double Oven	Multifunction Single Oven	Single Fan Oven
CONTROL TYPE		3	3
Programmable animated LED display	•	- 1	
Programmable digital display	<del>'</del>	•	•
Rotary control	•		
Push-pop-out knobs	•	•	•
Electronic temperature control, 5°C sensitive		•	<del></del>
COOKING FUNCTIONS			
Number of cooking functions	12	8	4
Bottom heater	•	•	-
Conventional	•	•	
Conventional+fan	•	•	
Fan cooking	•	•	•
3D	•	•	-
Low grill	•		-
Low grill+fan	· ·	_	_
Grill	•	•	•
Grill+fan	•	•	•
Slow cooking	•	-	-
Warm keeping	•	-	-
Defrost	•	•	•
Booster	-	-	-
Pizza	•	-	-
ADDITIONAL COOKING OPTIONS			
Booster, fast to-the-degree heating	•	-	-
Door closed grilling	•	•	•
MAIN OVEN			
Energy efficiency class	A -20%	A -20%	A -20%
Cavity volume, It	65	65	65
Smooth surface	•	•	•
Nano Coating Technology	-	•	-
Easy Clean™ grey enamel	•	•	•
Catalytic back wall		-	•
Catalytic side wall Removable side racks	•	•	•
TOP OVEN			
Energy efficiency class	A		_
Cavity volume, It	35	_	-
Grill Type	recessed grill integrated in the oven	_	_
Fully Variable Grill	•	-	-
Interior light	•	-	-
Drop down door	•	-	-
Easy Clean™ grey enamel	•	-	-
Smooth surface	•	-	-
LIGHTING			
Interior light	•	•	•
Light type	Square halogen	Outlands and James	
	Square naiogen	Cylindrical lamp	Cylindrical lamp
Number of lights	2	Cylindrical famp	Cylindrical lamp 1
Oven light with door opening			
Oven light with door opening OVEN DOOR	2	1	1
Oven light with door opening OVEN DOOR Full width glass inner door	2	1	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door	2 •	1	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door	2	1	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY	2 •	1 •	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock	2 •	1	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES	2 • • •	1	1 • • •
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFELY Key lock ACCESSORIES Cooking tray	2 • • • •	1	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray	2 • • • •	1 •	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf	2 • • • •	1 • • • • • • • • • • • • • • • • • • •	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack	2 • • • • • • • • • • • • • • • • • • •	1 •	1 • • •
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf	2 • • • • • • • • • • • • • • • • • • •	1 • • • • • • • • • • • • • • • • • • •	1 • • •
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFELY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE	2 0 0 0 0	1 • • • • • • • • • • • • • • • • • • •	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW	2 0 0 0 0	1 • • • • • • • • • • • • • • • • • • •	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption:	2 • • • • • • • • • • • • • • • • • • •	1 • • • • • • • • • • • • • • • • • • •	1
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption: Conventional, kWh Fan cooking, kWh TECHNICAL INFORMATION	2 • • • • • • • • • • • • • • • • • • •	1	1 • • • • • - 2.3
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption: Conventional, kWh Fan cooking, kWh TECHNICAL INFORMATION Noise level, dBA	2 • • • • • • • • • • • • • • • • • • •	1 • • • 1 3.1 0.88 0.79	1 • • • • • • • • • • • • •
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption: Conventional, kWh Fan cooking, kWh TECHNICAL INFORMATION Noise level, dBA Supply voltage, V/Hz	2 • • • • • • • • • • • • • • • • • • •	1  • • • • 1 3.1  0.88  0.79  46  220-240/50	1 • • • • - 2.3 - 0.79 46 220-240/50
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption: Conventional, kWh Fan cooking, kWh TECHNICAL INFORMATION Noise level, dBA Supply voltage, V/Hz Amperage, A	2 • • • • • • • • • • • • • • • • • • •	1  • • • • • 1 3.1 0.88 0.79 46 220-240 / 50 25	1 • • • • - 2.3 - 0.79 46 220-240/50 25
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFELY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption: Conventional, kWh Fan cooking, kWh TECHNICAL INFORMATION Noise level, dBA Supply voltage, V/Hz Amperage, A CE / VDE approved	2 • • • • • • • • • • • • • • • • • • •	1  • • • • 1 3.1  0.88  0.79  46  220-240/50	1 • • • • - 2.3 - 0.79 46 220-240/50
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFETY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption: Conventional, kWh Fan cooking, kWh TECHNICAL INFORMATION Noise level, dBA Supply voltage, V/Hz Amperage, A CE / VDE approved DIMENSIONS*	2 • • • • • • • • • • • • • • • • • • •	1  • • • • 1 3.1 3.1 0.88 0.79 46 220-240/50 25 •	1 • • • - 2.3 - 0.79 46 220-240/50 25
Oven light with door opening OVEN DOOR Full width glass inner door Removable door Drop down door SAFELY Key lock ACCESSORIES Cooking tray Baking tray Wire shelf Level of telescopic rack PERFORMANCE Total power, kW Energy consumption: Conventional, kWh Fan cooking, kWh TECHNICAL INFORMATION Noise level, dBA Supply voltage, V/Hz Amperage, A CE / VDE approved	2 • • • • • • • • • • • • • • • • • • •	1  • • • • • 1 3.1 0.88 0.79 46 220-240 / 50 25	1 • • • • - 2.3 - 0.79 46 220-240/50 25

 $<sup>^{\</sup>star}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.

# **BUILT-IN ELECTRIC HOBS**

MODEL CODE	MIN 54306 N	MKN 54322 X
Туре	Induction	Ceramic
Width, cm	60	60
CONTROL TYPE		
Touch sensitive front control	•	•
Side control	-	-
Separate touchpads	•	•
Digital display	•	•
Timer	•	•
ZONES		
Type of zones	Electric	Electric
Cooking levels per zone	1-9	1-9
Numbers of zones	4	4
Front left, mm - W	Ø 180 - 2000 / 2300 W	Ø 210 / 120 - 220 / 1750 V
Rear left, mm - W	Ø 180 - 2000 / 2300 W	Ø 140 - 1200 W
Front right, mm - W	Ø145 - 1600 / 1800 W	Ø160 - 1500 W
Rear right, mm - W	Ø210 - 2000 / 2300 W	Ø140 / 250 - 2000 / 1000 \
FEATURES		
Precise heat adjustment	•	•
On / off indicator	•	•
Booster, fast to-the-degree heating	•	-
Heat-up and simmering	•	•
SAFETY		
Child lock	•	•
Anti-over flow	•	•
Automatic stop system	•	•
Individual residual heat indicators	•	•
TECHNICAL INFORMATION		
Total power, W	7200	6900
Supply voltage, V/Hz	220-240 / 50	220-240 / 50
Amperage, A	16	32
CE / VDE approved	•	•
DIMENSIONS		
Product dimensions (HxWxD), mm	55x580x510	55x580x510
Niche dimensions (WxD), mm	560x490	560x490
Packed dimensions (HxWxD), mm	145x655x555	145x655x555
Unpacked weight Kg	11	11
Packed weight Kg	12	12
COLOUR OPTIONS		

### **BUILT-IN GAS HOBS**

MODEL CODE	GEN 53415 E	GEN 53403 E
Туре	Gas	Gas
Width, cm	60	60
CONTROL TYPE		
Front controls	•	•
BURNERS		
Number and type of burners	3 gas + 1 wok	4 gas
Front left, W	3.3 (triple ring wok)	1.7
Rear left, W	1.7	2.3
Front right, W	1	1
Rear right, W	1.7	1.7
FEATURES		
Burner caps	Cast iron	Enamel
Pan supports	Cast iron	Enamel
Electronic ignition integrated into the knobs	•	•
SAFETY		
Flame failure gas cut-out device	•	-
TECHNICAL INFORMATION		
Gas power, W	8600	8600
Supply voltage, V/Hz	220-230 / 50	220-230 / 50
CE / EN30 approved	•	•
DIMENSIONS		
Product dimensions (HxWxD), mm	98x580x510	98x580x510
Niche dimensions (WxD), mm	560x490	560x490
Packed dimensions (HxWxD), mm	190x670x580	190x670x580
Unpacked weight Kg	10.23	10.23
Packed weight Kg	11.95	11.95
COLOUR OPTIONS		

# **BUILT-IN WASHING MACHINE**

MODEL CODE	WMI 7462 W20
Туре	Fully electronic integrated Washir machine
MAIN FEATURES	machine
Load capacity, kg	7
Drum volume, It	55
Control type	Knob & digital display
Maximum spin speed, rpm	1600
No spin	•
Time delay	up to 24hr
Remaining time	•
Automatic water adjustment system  Durable bester	•
Drum material	Stainless steel
Porthole diameter, cm	30
Door opening angle	135
Door hinge	Left hand side
Cold fill	•
PROGRAMMES	
Number of programmes	16
Hand wash	•
Dark wash	•
Woollens	•
Mini 14'	•
Cottons 20	•
Rinse	•
Spin + Pump	•
Synthetics	•
Cottons eco	•
Cottons Intensive	•
Hygiene	•
Fast Full load	•
Machine care	•
Lingerie	•
Refresh	•
FUNCTIONS	
Prewash	•
Quick wash	•
Rinse plus	•
Anti creasing	•
SAFETY	
aquAvoid	•
Child lock	•
Door lock	•
PERFORMANCE Engrav officiones along	A++
Energy efficiency class Washing performance	A
Spin drying performance	A
Energy consumption (Cotton 60°), kWh	1.001
Water consumption (Cotton 60°), It	41
Annual energy consumption, (200 cycles) kWh/Year	194
Annual water consumption, (200 cycles) kWh/Year	9020
Standard cycle duration (Cotton 60°), min	160
TECHNICAL INFORMATION	
Supply voltage, V/Hz	230 / 50
Total power, W	2200
Amperage, A	10
Water supply connection 3/4"	•
Water pressure range, N/cm2	1 -100
Water connection	Cold
Cable length, cm	150
Maximum possible height from floor to water connection, cm	75
CE / VDE approval	•
DIMENSIONS*	200 000 510
Product dimonologic (HAMANI) mm	820x600x540
Product dimensions (HxWxD), mm	880x650x600
Packed dimensions (HxWxD), mm	70
Packed dimensions (HxWxD), mm Unpacked weight, kg	73
Packed dimensions (HxWxD), mm	73 74

 $<sup>\</sup>ensuremath{^{\star}}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.

#### **BUILT-IN DISHWASHER**

MODEL CODE	GVN 9483 E	GVS 9480 X
Туре	Full size integrated dishwasher	Slimline integrate dishwasher
MAIN FEATURES		
Place settings	13	10
Control type	LCD display	LCD display
Time delay	0-9.30hr	0-9.30hr
Programme follower	•	•
Drying system	Active ventilation	Hot Air
Salt and rinse aid indicators	•	•
Cold fill	•	•
PROGRAMMES	-	
Number of programmes	8	8
Prewash	•	•
Mini 30' 35°	•	•
Eco 50°	•	•
A express 58'		
Intensive 70°	•	•
		-
Delicates 40° Hygiene 70°	•	•
,°		-
Auto 40° - 65°	•	
SPECIAL FUNCTIONS	_	
Half load	•	•
Time delay	<u> </u>	•
INTERIOR DESIGN		
smartRACK, loaded adjustable upper basket	•	•
Height adjustable shelves for mugs	•	-
Foldable plate supports in the lower basket	•	•
Cutlery basket	Sideways sliding	•
Metal filter	•	•
SAFETY		
aquAvoid™	•	•
DMFS double motion float system	•	•
Antibacterial seal	•	•
PERFORMANCE		
Energy efficiency class	A++	A++
Cleaning performance	A	A
Drying performance	A	A
Water consumption, It	10	9
Energy consumption, kWh	0.92	0.74
Annual energy consumption, (220 cycles) kWh/year	261	211
Annual water consumption, (220 cycles) kWh/year	2800	2520
Noise level, dBA	44	47
TECHNICAL INFORMATION	**	- 1
1	220-240 / 50	220-240 / 50
Supply voltage, V/Hz Total power, W		220-240 / 50
	2200	
Amperage, A	10	10
Water supply connection 3/4"	0.1.100	0.1.400
Water pressure range, N/cm2	3 to 100	3 to 100
Warm water connection, °C	25	25
Cable length, cm	180	180
Maximum temperature for water intake, °C	25	25
CE / VDE approval	•	•
DIMENSIONS*		
Product dimensions (HxWxD), mm	820x598x550	820x450x550
Packed dimensions (HxWxD), mm	859x644x661	859x494x661
Height without worktop, cm	82	82
	1.5	1.5
Feet adjustable by. cm		
Feet adjustable by, cm	30	79.5
Unpacked weight, kg	39 42	29.5
	39 42	32

 $<sup>^{\</sup>star}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.

# **BUILT-IN REFRIGERATION**

MODEL CODE	TSM 1750 u	FSE 1630 u
Туре	Built Under Larder Fridge	Built Under Freezer
Height, cm	82	82
Control system	Mechanic	Electronic
Cooling system	Static	Static
CAPACITIES		
Total gross volume, It	130	96
Total net volume, It	128	87
Fridge net volume, It	128	-
Freezer net volume, It	-	87
FRIDGE FEATURES		
Number of height adjustable safety glass shelves	3	-
Number of chrome coated wine rack	-	-
Chrome coated door rack accessory	•	-
Number of transparent crispers	-	-
FREEZER FEATURES		
Star rating	-	4
Fast freeze function	-	-
Auto defrost	-	-
Number of transparent drawers	-	3
Number of transparent flaps	-	-
Icemaker and icebox	-	-
Handy rack	-	•
HYGIENE		
Antibacterial door seals	•	•
PERFORMANCE		
Energy efficiency class	A+	A+
Climate class	SN-T	SN-T
Energy consumption, kWh/year	118	178
Cooling gas	R600a	R600a
TECHNICAL INFORMATION		
Noise level, dBA	39	42
Total power, W	50	50
Supply voltage, V/Hz	230 / 50	230 / 50
Amperage, A	0,21	0,24
Freezing capacity, kg/24h	-	6
Temperature rise time, h	-	19
DIMENSIONS		
Product dimensions (HxWxD), mm	813-863x595x545	813-863x595x545
Niche dimensions (HxWxD), mm	820-870x600x550	820-870x600x550
BUILD DETAILS		
Reversible door	•	•
smartFIX, integrated hinges	•	•
COLOUR OPTIONS		

### **BUILT-IN REFRIGERATION**

MODEL CODE	KNM 1551 i	KNM 1561 i
Туре	Combi Fridge Freezer	Combi Fridge Freeze
Height, cm	177	177
Control system	Electronic	Electronic
Cooling system	Frost free	Frost free
CAPACITIES		
Total gross volume, It	280	230
Total net volume, It	240	217
Fridge net volume, It	190	155
Freezer net volume, It	48	62
FRIDGE FEATURES	-	
0-3°C super fresh zone capacity, It	-	19
Number of height adjustable safety glass shelves	3	3
Number of chrome coated wine rack	1	1
Chrome coated door rack accessory	•	•
Number of transparent crispers	1	1
FREEZER FEATURES		
Star rating	4	4
Fast freeze function	-	-
Auto defrost	-	-
Number of transparent drawers	2	3
Number of transparent flaps	1	1
HYGIENE		
Antibacterial door seals	•	•
PERFORMANCE		
Energy efficiency class	A+	A+
Climate class	SN-T	SN-T
Energy consumption, kWh/year	277	275
Cooling gas	R600a	R600a
TECHNICAL INFORMATION		
Noise level, dBA	38	40
Total power, W	85	125
Supply voltage, V/Hz	230 / 50	230 / 50
Amperage, A	0,6	0,5
Freezing capacity, kg/24h	2,5	3,5
Temperature rise time, h	13	13
DIMENSIONS		
Product dimensions (HxWxD), mm	1770x540x535	1770x540x535
Niche dimensions (HxWxD), mm	1789x560x550	1789x560x550
BUILD DETAILS		
Reversible door	•	•
smartFIX, integrated hinges	-	-
COLOUR OPTIONS		

# FREESTANDING COOKERS

MODEL CODE	GGN9351 Z	HKN9310 / HKN9310 Z
Туре	60cm Gas cooker	60cm Electric cooker
НОВ		
Adjustable Flame settings	•	-
Cast Iron Pan Supports	•	-
Hob on indicator	-	•
Ignition	•	-
Location	Front control with easy grip knobs	Front control with easy grip knobs
Flame Safety Devices	On all burners	-
No. Of Burners	4	4
Front left/ right - Rapidlite	-	•
Front left	2.9 KW	Ø180 - 1700 W
Front right	1 KW	Ø140 - 1200 W
Rear left/ right - Rapidlite	-	•
Rear left	2 KW	Ø140 - 1200 W
Rear right	2 KW	Ø180 - 1700 W
TIMER		
Function	Fully programmable Digital Timer	Fully programmable Digital Timer
TOP OVEN		· · · · · · · · · · · · · · · · · · ·
Energy Rating	-	A
Thermostatically Controlled	•	•
Grill	•	•
Grill Type	Recessed grill + Integrated in the Oven	Recessed grill + Integrated in the Oven
Fully Variable Grill	-	-
Grill Pan with Internal Rack & handle	•	•
Volume (litres)	31	35
Door Type	Glass	Glass
Door Opening	Drop down	Drop down
Interior Light	Diop down	e Biop down
Interior Cleaning	Easy clean enamel	Easy clean enamel
Shelves	Lasy clean chance	Lasy clean chanter
Shelf Positions	2	2
MAIN OVEN	2	
		1
Energy Rating Thermostatically Controlled		A
Volume (litres)	61	65
Door Type	Fixed full glass door	Fixed full glass door
Door opening	Swing left	Swing left
Interior Light		
Cleaning	Easy Clean enamel +	Easy Clean enamel + Side panels with Self Clea
Chalina	Side panels with Self Clean catalytic liners	catalytic liners
Shelves	2	2
Shelf Positions	5	5
cooking tray	•	•
ACCESSORIES		
4 adjustable feet	•	•
Auto Shut off lid	•	-
COOKING FUNCTIONS		
Gas Cooking	•	-
Static Cooking	-	•
Fan Cooking	-	•
Fan Grilling	-	-
Grill Cooking	•	•
PERFORMANCE		
Energy efficiency class	-	AA
Energy consumption:	-	-
Conventional, kWh	-	0,79
Fan heating, kWh	-	0,88
TECHNICAL INFORMATION		
Supply voltage, V/Hz	220 - 240 / 50 Hz	220 - 240 / 50 Hz
Amperage, A	13	minimum 32
Gas power, W	12,700 A	-
Electric power, W	12,700 A	9,900 W
LPG conversion kit available	- •	J,300 W
DIMENSIONS	•	
	000000000	000000000
Product dimensions (HxWxD), mm	900x600x600	900x600x600
Packed dimensions (HxWxD), mm	1025x660x700	1025x660x700
Unpacked weight, kg	64.3	62.9
Packed weight, kg	68	66.6
COLOUR OPTIONS		
White	-	HKN9310 - White
		HKN9310Z - Black

# FREESTANDING WASHING MACHINES

MODEL CODE	WNF 9448 AE20	WNF 8441 AE20	WNF 7341	WNF 6221	WNF 5220
Туре	Full Electronic	Full Electronic	Full Electronic	Full Electronic	Full Electronic
MAIN FEATURES	Washing Machine	Washing Machine	Washing Machine	Washing Machine	Washing Machin
Load capacity, kg	9	8	7	6	5
Drum volume, It	64	55	55	50	44
Control type	LCD	LCD	Knob & digital display	Knob & LED	Knob & LED
Maximum spin speed, rpm	1400	1400	1400	1200	1000
No spin	•	•	•	•	•
Time delay	Up to 24 hr	Up to 24 hr	Up to 19 hr	3 / 6 / 9 hr	3/6/9 hr
Remaining time	•	•	•	-	-
Automatic water adjustment system	•	•	•	•	•
Durable heater	•	•	•	•	-
Drum material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Porthole diameter, cm	34	34	30	30	30
Door opening angle	165	165	165	155	155
Door hinge	Left hand side	Left hand side	Left hand side	Left hand side	Left hand side
Cold fill	•	•	•	•	•
PROGRAMMES					
Number of programmes	16	16	11	11	15
Hand wash	•	•	•	•	•
Dark wash	•	•	•	•	•
Woollens	•	•	•	•	•
Sportswear	-	-	•	•	•
Shirts	•	-	•	•	•
Mini 14'	•	•	•	•	•
Cottons	•	•	•	•	•
Rinse	•	•	•	•	•
Spin + Drain	•	•	•	•	•
Synthetics	•	•	•	•	•
Lingerie	•	•	-	-	-
Cotton 20	•	•	-	-	-
Intensive	•	•	-	-	-
Refresh		•	-	-	-
Machine Care	•	•	-	-	-
Fast Full Load	•	•	-		-
Cottons Eco	•	•	•	•	•
FUNCTIONS	_	•	•	•	
Prewash	•	•	•	•	•
Quick wash	•	•	•	•	•
Rinse plus	•	•	•	<u>-</u>	<u> </u>
Rinse hold Aptierseeing	•	•		-	-
Anticreasing SAFETY		_	-	-	-
aquAvoid	•	•	•	•	•
Child lock	•	<u> </u>	•	•	•
Door lock	•	•	•	•	•
Child lock indicator light	•	•			
No water warning indicator light	•	•		-	
PERFORMANCE		_	-		
Energy efficiency class	A++	A++	A+	A+	A+
Washing performance	A	A	A	A	A
Spin drying performance	В	В	B	В	C
Energy consumption (Cotton 60°), kWh	1.25	0.74	1.1	0.89	0.74
Water consumption (Cotton 60°), It	58	52	41	40	33
Annual energy consumption, kWh/Year	242	171	210	182	158
Annual water consumption, kWh/Year	12760	11440	9020	8800	7260
Standard cycle duration (Cotton 60°), min	176	205	160	160	159
Noise levels (washing and spinning), dBA	52/75	54 / 73	57 / 74	58 / 72	59 / 72
Remaining moisture, %	53	53	53	53	62
TECHNICAL INFORMATION					
Supply voltage, V/Hz	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Total power, W	2200	2200	2200	2200	2200
Amperage, A	10	10	10	10	10
Water supply connection 3/4"	•	•	•	•	•
Water pressure range, N/cm2	1 - 100	1 - 100	1 - 100	1 - 100	1 - 100
Water connection	Cold	Cold	Cold	Cold	Cold
Cable length, cm	150	150	150	150	150
Maximumum possible height from floor to water connection, cm	75	75	75	75	75
CE / VDE approval	•	•	•	•	•
DIMENSIONS*					
Product dimensions (HxWxD), mm	840x600x620	840x600x550	840x600x550	840x600x510	840x600x470
FIUUUGI UIIIEIISIUIIS (FIXWXD). IIIIII	880x650x660	880x650x660	880x650x610	880x650x575	880x650x525
Packed dimensions (HxWxD), mm	UUUXUCUXUOO				
Packed dimensions (HxWxD), mm			70	64	59
Packed dimensions (HxWxD), mm Unpacked weight, kg	74	75	70 71	64 65	59 60
Packed dimensions (HxWxD), mm			70 71	64 65	59 60

 $<sup>\</sup>ensuremath{^\star}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.

# FREESTANDING TUMBLE DRYERS

MODEL CODE	TKF 8451 AG50	TKF 8431
Туре	Heat Pump Dryer	Condenser dryer
MAIN FEATURES		
Load capacity, kg	8	8
Drum volume, It	118	118
Control type	Mini LCD	Mini LCD
Time delay	1-24h	1-24h
Remaining time	•	•
Interior drum light	•	•
Bi-directional drum action	•	•
	•	•
Automatic sensor drying		•
Auto cool-down	•	
Auto anti-creasing cycle	•	•
Mains drain option	•	
3-level drying	•	•
Porthole diameter (HxW), cm	39.5x32	39.5x32
Door type	Ellipse	Ellipse
Door opening, °	150	150
Door hinge	Left hand	Left hand
PROGRAMMES		
Number of programmes	16	16
Wool refresh	•	•
Refresh	•	•
Lingerie	•	•
Viscose	•	•
Jeans	•	•
Sportswear	•	•
Shirts	•	•
Shirts 30°	•	•
Mix	•	•
Ready to iron (cotton)	•	•
		•
Ready to wear (cotton)	•	
Ready to iron (synthetic)	•	•
Ready to wear (synthetic)	•	•
Timed programme	•	•
Bedding	•	
SAFETY		
Child lock	•	•
End of cycle buzzer	•	•
Warning indicators	-	-
Clean filter	•	•
Water-tank full	•	•
PERFORMANCE		
Energy efficient class	A++	В
Energy consumption, kWh	1.92	4.71
Standard cycle duration (cotton, 1000 rpm, 60% moisture)	145	137
Annual energy consumption, kWh	232	561
TECHNICAL INFORMATION		
Supply voltage, V/Hz	230-240 / 50 Hz	230-240 / 50 Hz
Total maximum power, W	900	2700
Amperage, A	10	10
Cable length, m	1.5	1.5
	200	200
Maximum possible hose length, cm	66	66
Noise level, dBA		
CE / VDE approval	•	•
DIMENSIONS	050,000,000	050 000 000
Product dimensions (HxWxD), mm	850x600x600	850x600x600
Packed dimensions (WxD), mm	880x650x660	880x650x660
Unpacked weight, kg	54.5	38
Packed weight Kg	57	40
COLOUR OPTIONS		
White cabinet - silver panel with glass door	•	-
White cabinet - white panel with opaque door	-	•

# FREESTANDING DISHWASHER

Type  MAIN FEATURES  MAIN FEATURES  13 Control type Knob & LCD Time delay Programme follower  Programme follower  Outping system Salt and rinse aid indicators Cod fill PROGRAMMES  Number of programmes 7 Prevash Mini 30'  A express 56' Intensive 70° A compress 56' Intensive 70° Auto 40-65 Belicate 40 0 SPEGIAL FUNCTIONS Half load Intensive 70° Intended and adjustable upper basket Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket Metal filter  SAFETY aquivoid' plus DMFS double motion float system Antibacterial seal PERFORMANCE Energy efficiency class Cleaning performance A A Cleaning performance A Cleaning performance A A Cleaning performance A Cleaning pe	GSN 9122
MAIN FEATURES   Tags estitings   Tags   T	60 cm Full Size Electronic Dishwash
Place settings	
Control type	12
Time delay Programme follower Drying system Salt and rinse aid indicators Cold fill PROGRAMMES Number of programmes 7 Prevash Mini 30'	Knob & LED
Programme follower	3/6/9 hr
Drying system Cold fill PROGRAMMES Number of programmes Prewash Nini 30' Eco 50° A express 58' Intensive 70° Auto 40-65 Delicate 40 SPECIAL FUNCTIONS Half load Time delay INTERIOR DESIGN SmartRACK, loaded adjustable upper basket Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket SAFETY SAFETY SAFETY BMS double motion float system Antibacterial seal Auto 40-65 DMFS double motion float system Antibacterial seal Antibacteria	•
Salt and rinse aid indicators  Cold fill  PROGRAMMES  Number of programmes  7 Prewash  Mini 30'  Eco 50°  A express 58' Intensive 70° Auto 40-65 Delicate 40  SPECIAL FUNCTIONS  Half load  Time delay  TIME delay	Hot air drying
PROGRAMMES	•
PROGRAMMES   Number of programmes   7   Prewash	•
Number of programmes	
Prewash	5
Eco 50°	•
A express 58' Intensive 70'  Auto 40-65 Delicate 40  SPECIAL FUNCTIONS Half load  Immedelay INTERIOR DESIGN SmartRACK, loaded adjustable upper basket Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket Sideways sliding Metal filter SAFETY  ### Auto 40'd" plus  DMFS double motion float system Antibacterial seal  PERFORMANCE Energy efficiency class Cleaning performance A Drying performance A Drying performance A A Drying performance A A Drying performance A A Water consumption, It 10 Energy consumption, kWh/year 295 Annual water consumption, kWh/year 295 Annual water consumption, kWh/year A 102 Annual water consumption, kWh/year A 103 TECHNICAL INFORMATION Supply voltage, V/Hz Total power, W 2200 Amperage, A 4 Water supply connection 3/4 Water supply connection 3/4 Water pressure range, N/cm2 Water water on the supply connection of C C C / VDE approval  Maximum temperature for water intake, °C 60 CE / VDE approval DIMENSIONS  Product dimensions (HxWxD), mm 850x60x600 Packed dimensions (HxWxD), mm 889x644x661 Height without worktop, cm 62 Feet adjustable by, cm 51.5	•
Intensive 70° Auto 40-65 Delicate 40 SPECHAL FUNCTIONS Half load Time delay INTERIOR DESIGN SmartRACK, loaded adjustable upper basket Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket Sideways sliding Metal filter SAFETY SAFETY SAFETY SAFETY SHIPPING SUBSES  PERFORMANCE Energy efficiency class Cleaning performance Drying performance A Water consumption, kWh 1,02 Annual energy consumption, kWh/year Annual energy consumption, kWh Annual energy consumption, kWh/year Annual energy consumption, kWh/year Annual energy consumption, kWh Annua	•
Intensive 70° Auto 40-65 Delicate 40 SPECHAL FUNCTIONS Half load Time delay INTERIOR DESIGN SmartRACK, loaded adjustable upper basket Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket Sideways sliding Metal filter SAFETY SAFETY SAFETY SAFETY SHIPPING SUBSES  PERFORMANCE Energy efficiency class Cleaning performance Drying performance A Water consumption, kWh 1,02 Annual energy consumption, kWh/year Annual energy consumption, kWh Annual energy consumption, kWh/year Annual energy consumption, kWh/year Annual energy consumption, kWh Annua	•
Auto 40-65 Delicate 40 SPECIAL FUNCTIONS Half I load  Time delay INTERIOR DESIGN  smartRACK, loaded adjustable upper basket Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket Sideways sliding Metal filter SAFETY  aquAvoid" plus DMF5 double motion float system Antibacterial seal PERFORMANCE Energy efficiency class Cleaning performance A Drying performance A Porying performance A Porying performance A Drying nerformance A A Drying performance A A Drying performance A A Drying performance A A Drying performance A A Drying nerformance A A Drying nerformance A B Drying nerformance B Dryin	•
### SPECIAL FUNCTIONS Half load    Time delay   INTERIOR DESIGN   SmartRACK, loaded adjustable upper basket   ●   Height adjustable shelves for mugs   ●   Foldable plate supports in the lower basket   ●   Height adjustable shelves for mugs   ●   Foldable plate supports in the lower basket   ●   Cutlery basket   Sideways sliding   Metal filter   ●   ### SAFETY   ### SAFETY   ### SAFETY   ### SAFETY   ### Supurous   ●   ### DMFS double motion float system   ●   ### Art bacterial seal   ●   ### PERFORMANCE   ### Energy efficiency class   A+   ### Cleaning performance   A   ### Drying performance   A   ### Drying performance   A   ### Art bacterial seal   10   ### Energy consumption, kWh ### 1,02 ### Annual energy consumption, kWh/year   2.95 ### Annual energy consumption, kWh/year   2.800 ### Noise level, dBA   43 ### TECHNICAL INFORMATION ### Supply voltage, V/Hz   220-240 / 50 ### Total power, W   2.200 ### Amperage, A   10 ### Water supply connection 3/4   ●   ### Water supply connection 3/4   ●   ### Water supply connection 3/4   ●   ### Water supply connection 3/5   60 ### Cable length, cm   180cm   ### Maximum temperature for water intake, °C   60 ### Cable length, cm   850x600x600 ### Packed dimensions (HxWxD), mm   850x600x600 ### Packed dimensions (HxWxD), mm   850x600x600 ### Packed dimensions (HxWxD), mm   889x644x661 ### Height without worktop, cm   1.5	-
Half load Time delay  SmartRACK, loaded adjustable upper basket  Height adjustable shelves for mugs Foldable plate supports in the lower basket  Cutlery basket  Sideways sliding Metal filter  SAFETY  aquAvoid* plus  DMFS double motion float system  Antibacterial seal  PERFORMANCE  Energy efficiency class  Cleaning performance  A Drying consumption, kWh  1,02  Annual energy consumption, kWh/year  Annual energy consumption, kWh/year  Annual energy consumption, kWh/year  Supply voltage, V/Hz  Total power, W  Z200  Amperage, A  Water connection 3/4  Water pessure range, N/cm2  Water pessure range, N/cm2  Water pessure range, N/cm2  Water maker connection, °C  Gol Warm water connection, °C  Gol Warm water connection, °C  Gol User MWXD), mm  850x600x600  Packet dijnestable by, cm  1.5	-
Half load Time delay  SmartRACK, loaded adjustable upper basket  Height adjustable shelves for mugs Foldable plate supports in the lower basket  Cutlery basket  Sideways sliding Metal filter  SAFETY  aquAvoid* plus  DMFS double motion float system  Antibacterial seal  PERFORMANCE  Energy efficiency class  Cleaning performance  A Drying consumption, kWh  1,02  Annual energy consumption, kWh/year  Annual energy consumption, kWh/year  Annual energy consumption, kWh/year  Supply voltage, V/Hz  Total power, W  Z200  Amperage, A  Water connection 3/4  Water pessure range, N/cm2  Water pessure range, N/cm2  Water pessure range, N/cm2  Water maker connection, °C  Gol Warm water connection, °C  Gol Warm water connection, °C  Gol User MWXD), mm  850x600x600  Packet dijnestable by, cm  1.5	
INTERIOR DESIGN  smartRACK, loaded adjustable upper basket  Height adjustable shelves for mugs Foldable plate supports in the lower basket  Cutlery basket  Metal filter  SAFETY  aquAvoid" plus  DMFS double motion float system  Antibacterial seal  PERRORNANCE  Energy efficiency class  Cleaning performance  A Drying performance  A Drying performance  A A  Drying performance  A A  Drying performance  A A  Drying performance  A A  Drying performance  A A  Drying berformance  A A  A B  Drying berformance  A B  Drying be	•
smartRACK, loaded adjustable upper basket Height adjustable shelves for mugs Cutlery basket Sideways sliding Metal filter SAFETY aquAvoid* plus DMFS double motion float system Antibacterial seal PERFORMANCE Energy efficiency class Cleaning performance A Drying performance A A Drying performance A A Drying performance A A Drying performance A Mater consumption, It 10 Energy consumption, kWh/year Annual energy consumption, kWh/year Annual water connection of the kWater pressure range, N/cm2 Amperage, A  10 Water pressure range, N/cm2 Antibacterial seal  ECF / VDE approval DIMENSIONS* Product dimensions (HxWxD), mm Assyntable by, cm  850x600x600 Assyntable by, cm  1.5	•
Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket Sideways sliding Metal filter  SAFETY aquAvoid* plus DMFS double motion float system Antibacterial seal PERFORMANCE Energy efficiency class A+ Cleaning performance Drying performance A Mater consumption, It 10 Energy consumption, kWh 1,02 Annual energy consumption, kWh/year Annual energy consumption, kWh/year Annual energy consumption, kWh/year Noise level, dBA 43 TECHNICAL INFORMATION Supply voltage, V/Hz 10 Mater supply connection 3/4 Water connection, °C Cable length, cm Maximum temperature for water intake, °C GE / VDE approval DIMENSIONS* Product dimensions (HxWxD), mm 850x600x600 Packed dimensions (HxWxD), mm 889x644x661 Height without worktop, cm 82 Feel adjustable by, cm  Sideways sliding A+  A+ Cleaning performance A A+ A+ Cleaning performance A A A+	
Height adjustable shelves for mugs Foldable plate supports in the lower basket Cutlery basket Sideways sliding Metal filter  SAFETY aquAvoid* plus DMFS double motion float system Antibacterial seal PERFORMANCE Energy efficiency class A+ Cleaning performance Drying performance A Mater consumption, It 10 Energy consumption, kWh 1,02 Annual energy consumption, kWh/year Annual energy consumption, kWh/year Annual energy consumption, kWh/year Noise level, dBA 43 TECHNICAL INFORMATION Supply voltage, V/Hz 10 Mater supply connection 3/4 Water connection, °C Cable length, cm Maximum temperature for water intake, °C GE / VDE approval DIMENSIONS* Product dimensions (HxWxD), mm 850x600x600 Packed dimensions (HxWxD), mm 889x644x661 Height without worktop, cm 82 Feel adjustable by, cm  Sideways sliding A+  A+ Cleaning performance A A+ A+ Cleaning performance A A A+	•
Foldable plate supports in the lower basket	•
Cutlery basket         Sideways sliding           Metal filter         ●           SAFETY         aquAvoid* plus         ●           DMFS double motion float system         ●           Antibacterial seal         ●         PERFORMANCE           Energy efficiency class         A+         Cleaning performance           A Drying performance         A         A           Water consumption, It         10         Energy consumption, kWh/year         295           Annual energy consumption, kWh/year         295         Annual water consumption, kWh/year         2800           Noise level, dBA         43         TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS**         Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661 <t< td=""><td>•</td></t<>	•
Metal filter         SAFETY           aguAvoid* plus         ●           DMFS double motion float system         ●           Antibacterial seal         ●           PERFORMANCE         ■           Energy efficiency class         A           Cleaning performance         A           Water consumption, It         10           Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual water consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION         Supply voltage, V/Hz           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         •           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661	Sideways sliding
aguAvoid" plus  DMFS double motion float system  Antibacterial seal  PERFORNANCE  Energy efficiency class  Cleaning performance  A  Drying performance  A  A  Drying performance  A  Mater consumption, It  Energy consumption, kWh/year  Annual water consumption, kWh/year  Annual water consumption, kWh/year  Babo  Noise level, dBA  43  **TECHNICAL INFORMATION**  Supply vollage, V/Hz  220-240 / 50  Total power, W  2200  Amperage, A  10  Water supply connection 3/4  ■  Water pressure range, N/cm2  Babochook on  Maximum temperature for water intake, °C  60  CE / VDE approval  DIMENSIONS**  Product dimensions (HxWxD), mm  850x600x600  Packed dimensions (HxWxD), mm  889x644x661  Height without worktop, cm  82  Feet adjustable by, cm  1.5	•
DMFS double motion float system         ●           PERFORMANCE           Energy efficiency class         A+           Cleaning performance         A           Drying performance         A           Water consumption, It         10           Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual energy consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION         343           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         •           DIMENSIONS*         •           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	
DMFS double motion float system         ●           PERFORMANCE           Energy efficiency class         A+           Cleaning performance         A           Drying performance         A           Water consumption, It         10           Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual energy consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION         343           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         •           DIMENSIONS*         •           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	•
PERFORMANCE           Energy efficiency class         A+           Cleaning performance         A           Drying performance         A           Water consumption, It         10           Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual water consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         Intensions           DIMENSIONS*         *           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         89x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	•
Energy efficiency class         A+           Cleaning performance         A           Drying performance         A           Water consumption, It         10           Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual water consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         *           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	•
Cleaning performance         A           Drying performance         A           Water consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual vater consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	
Drying performance         A           Water consumption, It         10           Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual water consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         **           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	A+
Water consumption, It         10           Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual water consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         **           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         89x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	A
Energy consumption, kWh         1,02           Annual energy consumption, kWh/year         295           Annual water consumption, kWh/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS**         **           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	A
Annual energy consumption, kWh/year 295  Annual water consumption, kWh/year 2800  Noise level, dBA 43  **TECHNICAL INFORMATION  Supply voltage, V/Hz 220-240 / 50  Total power, W 2200  Amperage, A 10  Water supply connection 3/4  Water supply connection, °C 60  Cable length, cm 180cm  Maximum temperature for water intake, °C 60  CE / VDE approval  DIMENSIONS*  Product dimensions (HxWxD), mm 850x600x600  Packed dimensions (HxWxD), mm 889x644x661  Height without worktop, cm 82  Feet adjustable by, cm 1.5	15
Annual water consumption, Wth/year         2800           Noise level, dBA         43           TECHNICAL INFORMATION         220-240 / 50           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	1,02
Noise level, dBA         43           TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         **           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	291
TECHNICAL INFORMATION           Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	3920
Supply voltage, V/Hz         220-240 / 50           Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / V/DE approval         ●           DIMENSIONS*           Product drimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	48
Total power, W         2200           Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	
Amperage, A         10           Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         ■           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	220-240 / 50
Water supply connection 3/4         ●           Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*           Product drimensions (HxWxD), mm         850x600x600           Packed drimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	2200
Water pressure range, N/cm2         3 to 100           Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*           Product drimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	10
Warm water connection, °C         60           Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*           Product drimensions (HxWxD), mm         850x600x600           Packed drimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	•
Cable length, cm         180cm           Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         **           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	3 to 100
Maximum temperature for water intake, °C         60           CE / VDE approval         ●           DIMENSIONS*         •           Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	60
CE / VDE approval         •           DIMENSIONS*         850x600x600           Product drimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	180cm
DIMENSIONS*         850x600x600           Product dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	60
Product dimensions (HxWxD), mm         850x600x600           Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	•
Packed dimensions (HxWxD), mm         889x644x661           Height without worktop, cm         82           Feet adjustable by, cm         1.5	
Height without worktop, cm         82           Feet adjustable by, cm         1.5	850x600x600
Feet adjustable by, cm 1.5	889x644x661
	82
	1.5
	43
Packed weight, kg 49	46
COLOUR OPTIONS	

 $<sup>\</sup>ensuremath{^{\star}}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.

# FREESTANDING REFRIGERATION - FRENCH DOOR FRIDGE FREEZER

MODEL CODE	KFD 9952 PXD
Туре	French Door Fridge Freezer
Control system	Electronic control & touch button
Cooling system	Frost Free
CAPACITIES	
Total gross volume, lt / cu.ft	600 / 21.2
Total net volume, It / cu.ft	549 / 19.4
Fridge net volume, It / cu.ft	395 / 14
Freezer net volume, It / cu.ft	154 / 5.4
FRIDGE FEATURES	1017 0.1
Frost free	•
Quick cool function	•
0-3°c Super Fresh Zone	•
Blue zone	•
Number of height adjustable glass shelves	2
Number of door racks	6
Number of transparent crispers	2
Chilled water dispenser (plumbing required)	•
LED lighting	<u> </u>
FREEZER FEATURES	
Star rating	4
Fast freeze function	4
Frost free	<u> </u>
Number of drawers	2
Automatic Ice maker (plumbing required)	2
HYGIENE	
	•
Antibacterial seal PERFORMANCE	
	A+
Energy efficiency class	SN-T
Climate class	
Energy consumption, kWh/year	458 R600a
Cooling gas	Rouua
TECHNICAL INFORMATION	040
Supply voltage, V/Hz	240
Noise level, dBA	44
Fan ventilation	•
Freezing capacity, kg/24 h	10
Temperature rise time, h	22
DIMENSIONS*	
Product dimensions (HxWxD), cm - excluding handles	182x84x74.5
Packed dimensions (HxWxD), cm	191x90.7x82
BUILD DETAILS	
Reversible doors	N/A
Door hinge	Right and left hand side
Adjustable front feet	•
Harris Harris Company of the Company	External
Handle type COLOUR OPTIONS	LAIGITIAI

 $<sup>^{\</sup>star}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.

MODEL CODE	KGM 9690 P / KGM 9690 PX	KGM 9680 P KGM 9680 PX	KGM 9550 P / KGM 9550 PX	KGM 9530 P
Туре	Combi Fridge Freezer	Combi Fridge Freezer	Combi Fridge Freezer	Combi Fridge Freezer
Height, cm	191	190.5	182	152
Control system	Electronic control w/o display	Electronic control w/o display	Electronic control w/o display	Electronic control w/o displa
Cooling system	Frost Free	Frost free	Frost free	Frost free
CAPACITIES				
Total gross volume, It / cu.ft	410 / 14.5	315 / 11.1	300 / 10.5	240 / 8.5
Total net volume, It / cu.ft	348 / 12.3	269 / 9.5	244 / 8.6	197 / 6.9
Fridge net volume, It / cu.ft	230 / 8.2	175 / 6.2	157 / 5.5	134 / 4.7
Freezer net volume, It / cu.ft	118 / 6.0	94 / 3.3	87 / 3.1	63 / 2.2
FRIDGE FEATURES	1.07			32, ==
Frost free	Auto Defrost	Auto defrost	Auto defrost	Auto defrost
Quick cool function	-	-	-	-
Number of height adjustable glass shelves	3	3	3	2
Number of chrome coated wine racks	1	1	1	-
Number of door racks	3	3	3	3
Chrome coated bottle retainer	1	1	-	-
Number of transparent crispers	2	1	1	1
Interior light	•	•	•	•
FREEZER FEATURES				
Star rating	4	4	4	4
Fast freeze function	-	-	-	-
Frost free	•	•	•	•
Number of drawers	4	4	3	2
Number of flaps	-	-	1	1
Twist & serve ice cube tray	•	•	-	-
Ice bank tray		•	•	•
HYGIENE		-	-	_
Antibacterial seal	•	•	•	•
Antibacterial handle	•	•		
PERFORMANCE				
Energy efficiency class	A+	A+	A+	A+
Climate class	SN-T	SN-T	SN-T	SN-T
Energy consumption, kWh/year	336	298	299	243
Cooling gas	R600a	R600a	R600a	R600a
TECHNICAL INFORMATION				
Supply voltage, V/Hz	230 /50	230 / 50	230 / 50	230 / 50
Noise level, dBA	43	42	43	41
Freezing capacity, kg/24 h	6	6	4	3.5
Temperature rise time, h	18	18	13	14
DIMENSIONS*				
Product dimensions (HxWxD), mm	1910x700x600	1905x595x600	1820x545x600 mm	1520x545x600 mm
Packed dimensions (HxWxD), mm	1980x770x680	1952x665x680	1890x575x680 mm	1595x576x628 mm
BUILD DETAILS				
Reversible doors	•	•	•	•
Door hinge	Right hand side	Right hand side	Right hand side	Right hand side
Adjustable front feet	•	•	•	•
Handle type	External	External	External	External
COLOUR OPTIONS				
White	KGM 9690 P	KGM 9860 P	KGM 9550 P	KGM 9530 P
Stainless steel	KGM 9690 PX	KGM 9680 PX	KGM 9550 PX	

 $<sup>^{\</sup>star}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.

MODEL CODE	SOM 9673 P	FNT 9673 P
Туре	Tall Larder Fridge	Tall Freezer
Height, cm	171	171
Control system	Mechanic	Electronic control
Cooling system	Auto defrost	Frost free
CAPACITIES	Auto dollost	1103(1100
Total gross volume, It / cu.ft	415 / 14.6	290 / 10.2
Total net volume, It / cu.ft	367 / 12.9	230 / 10.2
Fridge net volume, It / cu.ft	367 / 12.9	255 / 9.0
Freezer net volume, It / cu.ft	307 / 12.9	255 / 9.0
FRIDGE FEATURES	-	233 / 9.0
Frost free	A. to Defend	
	Auto Defrost	-
Quick cool function		
0-3°C super fresh zone	•	-
Number of height adjustable glass shelves	4	-
Number of chrome coated wine racks	1	-
Number of door racks	4	-
Chrome coated rack accessory	•	-
Number of transparent crispers	1	-
Interior light	•	-
FREEZER FEATURES		
Star rating	-	4
Fast freeze function	-	•
Frost free	-	•
Number of drawers	-	5
Number of flaps	-	2
Twist & serve ice cube tray	-	•
HYGIENE		
Antibacterial seal	•	•
Antibacterial handle	•	•
PERFORMANCE		
Energy efficiency class	A+	A+
Climate class	SN-T	SN-T
Energy consumption, kWh/year	141	310
Cooling gas	R600a	R600a
TECHNICAL INFORMATION		
Supply voltage, V/Hz	230 / 50	230 / 50
Noise level, dBA	39	42
Fan ventilation	•	•
Freezing capacity, kg/24 h	-	16
Temperature rise time, h		18
DIMENSIONS*	-	10
Product dimensions (HxWxD), mm	1710x600x650	1710x600x650
Product dimensions (HxWxD), mm	1810x665x680	1810x665x680
BUILD DETAILS	U00XCOOXUI 01	10100000000
Reversible doors	- Friend	
Handle type	External	External
COLOUR OPTIONS		
White	•	•

 $<sup>\</sup>ensuremath{^{\star}}\xspace$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.


MODEL CODE	TSM 1551 P	TSM 1541 P	FNE 1531 P
Туре	Undercounter Larder Fridge	Undercounter Fridge with 4 Star Freezer	Undercounter Frost Free Freeze
Height, cm	85	85	85
Control system	Mechanic	Mechanic	Electronic control
Cooling system	Static	Static	Frost Free
CAPACITIES			
Total gross volume, cu.ft / It	135 / 4.8	120 / 4.2	90 / 3.2
Total net volume, cu.ft / It	130 / 4.6	114 / 4.0	75 / 2.6
Fridge net volume, cu.ft / It	130 / 4.6	101 / 3.5	-
Freezer net volume, cu.ft / It	-	13 / 0.5	75 / 2.6
FRIDGE FEATURES		10 / 0.0	1072.0
Auto defrost	•	•	_
Number of height adjustable glass shelves	3	2	-
Number of door racks	3	3	_
Number of transparent crispers	1	1	
Interior light	•	ė	_
FREEZER FEATURES			
Star rating		4	4
Manual defrost		•	Frost Free
Number of drawers		-	2
Number of flaps			1
Ice cube tray		•	<u> </u>
Ice bank tray		-	<u>`</u>
HYGIENE			
Antibacterial seal	•	•	•
PERFORMANCE			
Energy efficiency class	A+	A+	A+
Climate class	SN-T	SN	SN-T
Energy consumption, kWh/year	116	169	184
Cooling gas	R600a	R600a	R600a
TECHNICAL INFORMATION	110008	110008	110008
Supply voltage, V/Hz	230 / 50	230 / 50	230 / 50
Noise level, dBA	42	40	43
Freezing capacity, kg/24 h	42	2	10
Temperature rise time, h		10	10.5
DIMENSIONS*	_	10	10.5
Product dimensions (HxWxD), mm	850x545x600	850x545x600	850x545x600
Packed dimensions (HxWxD), mm	885x575x665	885x575x665	885x575x665
BUILD DETAILS	000X070X000	0003703000	00030703000
Reversible door	•	•	•
Door hinge	Right hand side	Right hand side	Right hand side
	Right hand side	Right hand side	Right hand side
Adjustable front feet		-	
Handle type	External	External	External
COLOUR OPTIONS			
White	•	•	•


 $<sup>\</sup>ensuremath{^{\star}}$  Dimensions exclude any protruding features such as handles, knobs and bowed doors.


# BUILT-IN INSTALLATION DIAGRAMS


#### **INSTALLATION DIAGRAMS**

All measurements in (mm)

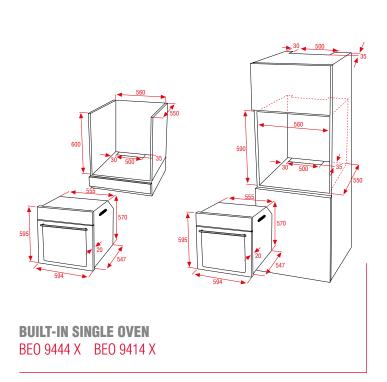

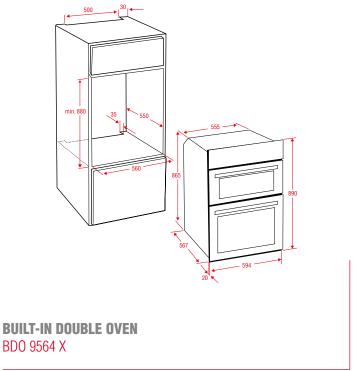

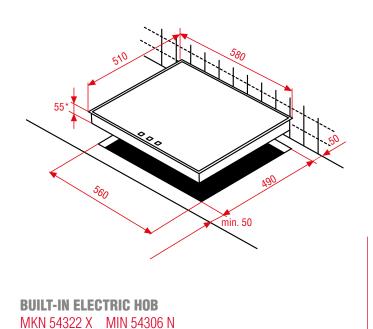


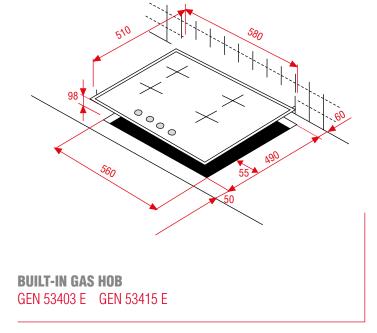



<sup>\*</sup> Dependent on model. Check technical details on page 107

# **INSTALLATION DIAGRAMS**

All measurements in (mm)




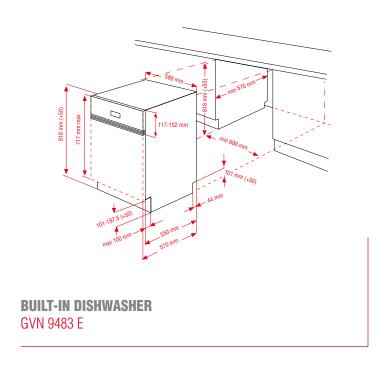


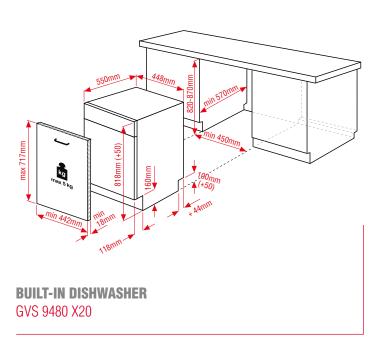


# **INSTALLATION DIAGRAMS**

All measurements in (mm)

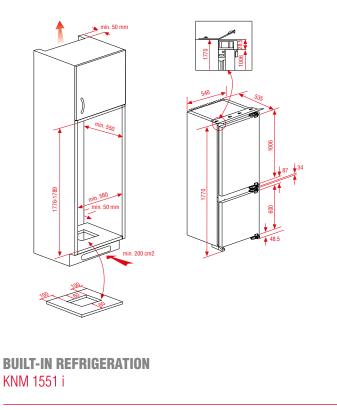


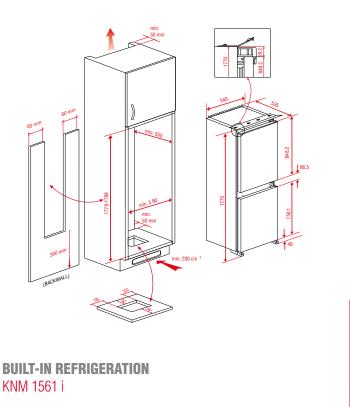

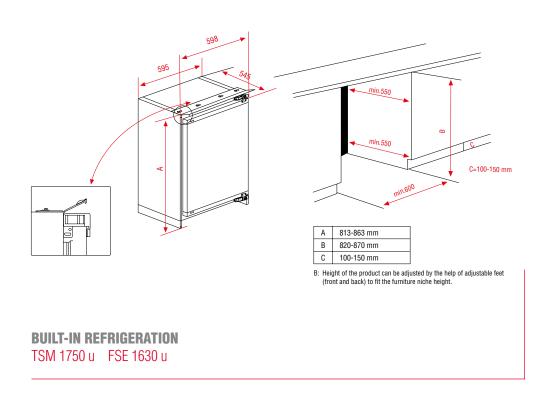

# NOTES

# NOTES

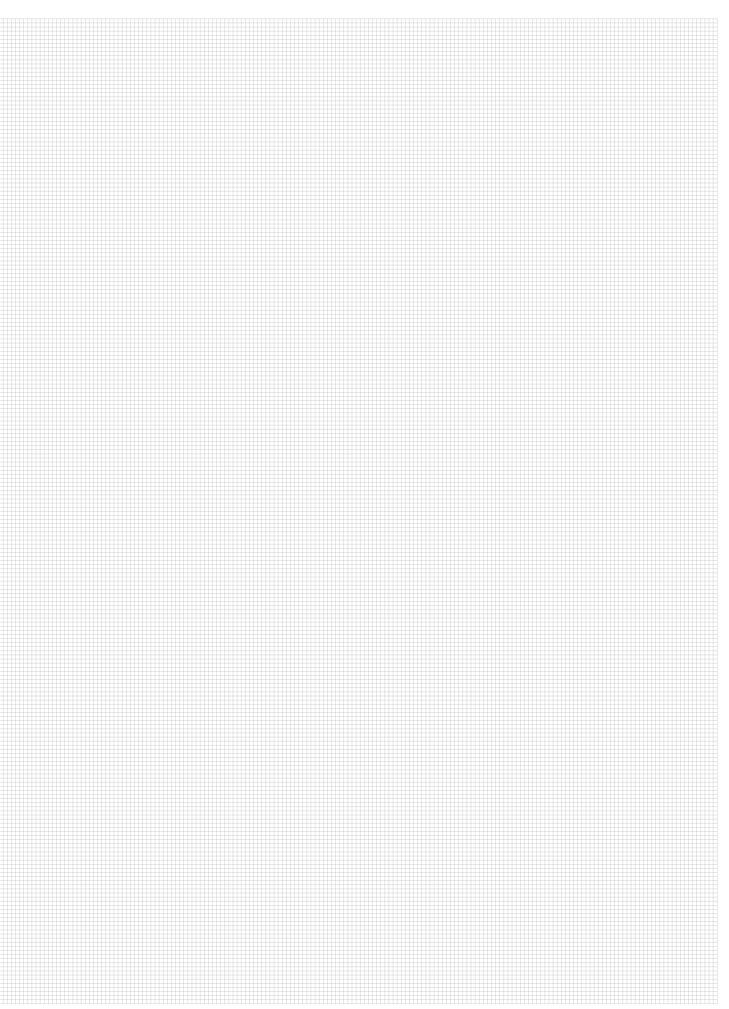





Blomberg 1 Greenhill Crescent Watford Hertfordshire WD18 8QU Tel: 0845 850 5008 Fax: 0845 600 4925 www.blomberguk.com