


Series 6, Gas hob, 60 cm, Stainless steel
PCP6A5I90

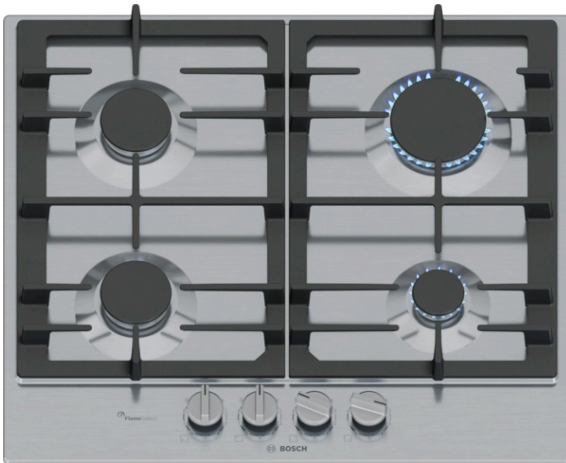

Optional accessories

HEZ32WA00 : Wireless food thermometer
HEZ9SE040 : 4 pieces Set

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

- **Flame Select:** Enjoy precise control of the flame.
- **Dishwasher-safe pan supports:** Easy, scrub-free cleaning.
- **Removable dials:** effortless cleaning, happier cooking.
- **Easy cleaning:** detachable dials and dishwasher-suitable pan supports make cleaning a breeze.
- **Continuous cast-iron pan support:** for high firmness and stability of cookware.

Technical Data

Product name/family : gas hob w integrated controls

Built-in / Free-standing : Built-in

Energy input : Gas

Total number of positions that can be used at the same time :
4

Required niche size for installation (HxWxD) : 45 x 560-560 x
480-490 mm

Width of the appliance : 582 mm

Dimensions : 51.5x582x520 mm

Dimensions of the packed product (HxWxD) : 141 x 651 x 578
mm

Net weight : 10.7 kg

Gross weight : 11.8 kg

Residual heat indicator : Separate

Location of control panel : Front

Basic surface material : Stainless steel

Color of surface : Stainless steel

Length electrical supply cord : 100.0 cm

EAN code : 4242005496006

Gas connection rating : 7500 W

Fuse protection : 3 A

Voltage : 220-240 V

Frequency : 50; 60 Hz



Series 6, Gas hob, 60 cm, Stainless steel PCP6A5I90

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

ordered via the customer service. For nozzle change, please contact the customer service.

- Dimensions of the product (HxWxD mm): 51.5 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 7.5 KW

Design

- Stainless steel surface
- Cast iron pan supports
- full metal

Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 gas burners:
- Left front: standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: high-speed burner up to 3 KW (depending on gas type)
- Right front: economy burner up to 1 KW (depending on gas type)

Cleaning

- Removable control dials for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be

Series 6, Gas hob, 60 cm, Stainless steel PCP6A5I90

